


# Q3<sub>r</sub>

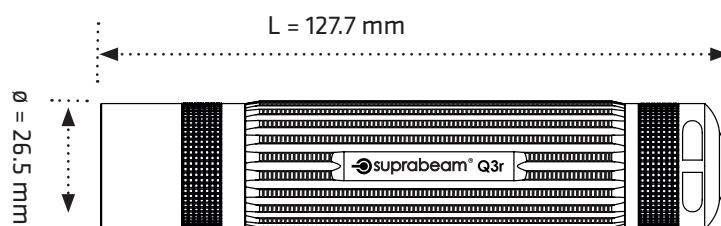

LED / Focus configuration	1 CREE Power Chip / Sliding Hyperfocus™ Lens
Case Material / Surface Treatment	Anodized, High Strength Aluminium
Case Color	Anthracite Dark Grey
Switch	Quality Tested Switch System At Rear Constant / Momentary Light
Dimensions	L = 127.7 mm, Ø = 26.5 mm
Weight incl. battery	139 g
Tightness	Splash Waterproof IPx4
Temperature	-20° C to +50° C
Built in DC / DC Controller	YES (Constant Current Control)
Standard Power Source	Li-ion 18650 (8.14 Wh)
Beam / Distance	Floodlight <> Spotlight > 275 meters
Luminous Flux	BOOST: 400 Lumens/ High: 200 Lumens/ Reduced: 50 Lumens/ Strobe 10 Hz
Lighting Time	< 15 hours
Accessories included	Hyper Focus™ Pro. Pouch with Velcro and Press Stud 100-240VAC Adaptor with USB cable and external ICR 18650 Charger Manual
EAN-Code	57 04049 90016 5/57 04049 90024 0
Customs Tariff Number	8513 1000
Packaging	Gift Box with Space for Second Battery
Single Box Content / Size / Weight	1 pcs, 26.2 x 18.3 x 5.3 cm / 630 g
Sales Box Content / Size / Weight	6 pcs, 37.5 x 27.2 x 16.5 cm / 3.9 kg
Master Box Content / Size / Weight	12 pcs, 39.0 x 29.0 x 34.0 / 9.7 kg
Order's Address	info@suprabeam.com
Part No.	900.035 / 900.036 (additional battery)