


Q4_{xr}

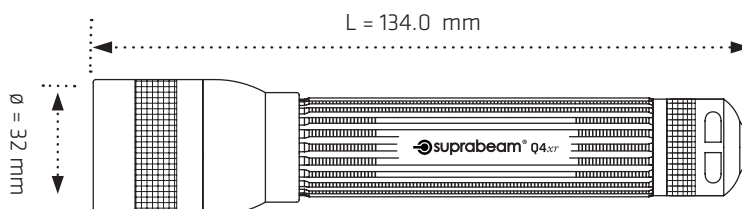

LED / Focus configuration:	1 CREE Power Chip / Sliding Hyperfocus™
Case Material / Surface Treatment:	Anodized, High Strength Aluminium
Case Color:	Anthracite Dark Grey
Switch:	Quality Tested Metal Switch With Touch Function - Switch At Rear
Dimensions:	L: 134mm, Ø: 32mm
Weight incl. battery:	132g
Ingress Protection Rating:	Splash Waterproof IPx4
Temperature:	-20°C to +50°C
Built in DC/DC Controller:	YES, 5-step controller by press or touch
Standard Power Source:	1 x 18650 Li-ion (8.14 Wh) 2 pcs. included
Beam / Distance:	Variable from Spot to Floodlight / < 250 Meters
Luminous Flux:	BOOST: 800 lm / High: 350 lm / Medium: 200 lm / Low: 50 lm / Strobe 10 Hz
Lighting Time:	< 24 hours
Accessories included:	Pro. Quality Pouch with Velcro and Press Stud, Strap 100-240VAC Adaptor with USB cable and external ICR 18650 Charger
Customs Tariff Number:	8513 1000
Packaging:	PE Portable Box with Space for Second Battery
Single Box Content / Size / Weight:	1 pcs, 25 x 21 x 7 cm / 975 g
Master Box Content / Size / Weight:	8 pcs, 40.5 x 41 x 27.5 cm / 6.5 kg
Order's Address:	info@suprabeam.com

Barcode and part number, varies by language, contact Suprabeam for information.