


Q7_{xr}

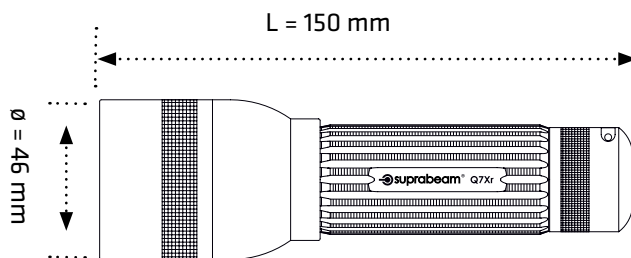

LED / Focus configuration	1 CREE Power Chip / Sliding Hyperfocus™ Lens
Case Material / Surface Treatment	Anodized, High Strength Aluminium
Case Color	Anthracite Dark Grey
Switch	Quality Tested Switch System At Rear Constant / Momentary Light/ Reduced Light
Dimensions	L = 150 mm, Ø = 46 mm
Weight incl. battery	307 g
Tightness	Splash Waterproof IPx4
Temperature	-20° C to +50° C
Built in DC / DC Controller	YES (Constant Current control / Reduced Output)
Standard Power Source	Li-ion 26650 (14.8 Wh)
Beam / Distance	Floodlight <> Spotlight > 335 Meters
Luminous Flux	Boost: 800 Lumens / High: 400 Lumens / Reduced: 170 Lumens/ Strobe 10Hz
Lighting Time	< 9 hours
Accessories included	Hyper Focus™ Pro. Quality Pouch with Velco and Press Stud 100-240VAC Adaptor with USB cable and external ICR 26650 Charger Manual
EAN-Code	57 04049 90048 6
Customs Tariff Number	8513 1000
Packaging	PE Portable Box with Space for Second Battery
Single Box Content / Size / Weight	1 pcs, 27.5 x 20.7 x 6.8 cm / 950 g
Sales Box Content / Size / Weight	6 pcs, 43.5 x 30.5 x 23 cm / 6.4 kg
Master Box Content / Size / Weight	6 pcs, 44.5 x 31 x 26.5 cm / 7 kg
Order's Address	info@suprabeam.com
Part No.	900.078