








ACCESSORIES

PRODUCT	DESCRIPTION	PART NUMBER	WEIGHT	SINGLE BOX SIZE	EAN CODE
	Battery: Li-Ion cell 26650 (5'000 mAh)	951.031	94 g	L: 17.0 cm, W: 11.0 cm, H: 4.5 cm	5704049911550
	USB-C Charging station for Li-ion 26650 (for Q7xrs)	995.0158	26 g	L: 8.5 cm, W: 5.0 cm, H: 2.5 cm	5704049911826
	Bike holder Q3/Q4/Q7 series	950.012	48 g	L: 17.0 cm, W: 11.0 cm, H: 5.5 cm	5704049904491


SPARE PARTS

PRODUCT	DESCRIPTION	PART NUMBER	EAN CODE
	Nylon holster for SUPRABEAM Q7xrs	995.0161	5704049912021
	Switch complete for SUPRABEAM Q7xrs	995.0133	5704049907751
	Replacement Lens for Q7xrs. complete	995.0134	5704049907768

995.0134



995.0133

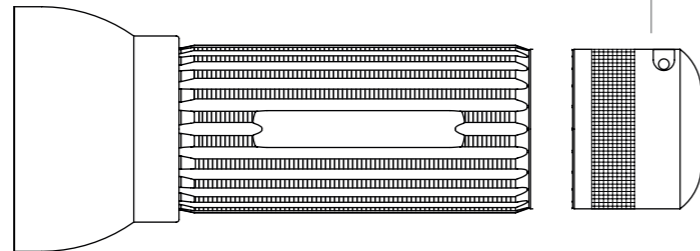

Distributor's Stamp:

Suprabeam is manufactured by the Steiner Group and distributed worldwide by:

Suprabeam A/S
Dyssen 3
DK-8200 Aarhus N, Denmark

Phone: +45 87 525 212
www.suprabeam.com
info@suprabeam.com

suprabeam®

Q7xrs



4200 LUMENS



Li-ion
5000 mAh



440 m



297 g



15° - 75°


507.6311

KEY FEATURES /UNIQUE SELLING POINTS (USP)



ELETRONIC SWITCH

The Q7xrs is equipped with an intelligent electronic switch, enabling you to adjust the light level precisely for your needs. The switch is solid rubber with an extra-grip texture, which gives you the ultimate control in all situations.



DC CONVERTER TECHNOLOGY

The Q7xrs is fitted with our new and highly efficient electronic circuitry. It reduces the heat development of the Power LED and decreases the energy consumption. The advantage is 50 % longer runtimes and highest constant light output.



USB-C FAST CHARGING BASE

Connected by USB-C, the 100 - 240VAC power adapter charges the Li-Ion cell at maximum rate. With or without the USB-C cable it shows the battery status on a 5-LED light stripe at any time.




SLIDING HYPERFOCUS™

The sliding Hyperfocus™ optical system collects the LED radiance and distributes it with maximum efficiency from a perfect round floodlight beam to a highly intensive, long range spot beam. All just by one-hand sliding of the head.



DIMMING + MEMORY

The new electronic task switch combined with our new dimming control, offers simple and stepless power adjustment from 1000 down to 6 lumens. It memorizes the last used light output and with one single click it activates maximum power again.



FOCUS LOCK

When the torch is slid to Focus, simply turn the head a couple of degrees to the left to enable the lock-function. This will engage a brake-function which will prevent unwanted sliding from focus to flood beam.

PACKAGING




PACKAGING

Customs Tariff Number:	8513 1000
Packaging:	Recyclable Cardboard Packaging
Single Box Content / Size / Weight:	1 pcs, height/width/depth: 19 x 19 x 5 cm / 527 g
Master Box Content / Size / Weight:	5 pcs, height/width/depth: 22 x 28 x 21 cm / 2.9 kg
Part. No.:	507.6311
EAN-CODE:	5704049911543

SPECIFICATIONS

LED / Focus Configuration:	1 CREE Power Chip / Sliding Hyperfocus™
Case Material / Surface Treatment:	Prime Aluminium quality 6061, anodized
Case Color:	Anthracite Dark Grey
Switch at Rear:	Electronic Switch with Solid Silicone Button
Dimensions:	L: 158 mm, ø: 46 mm
Weight incl. Battery:	297 g
Ingress Protection Rating:	Splash Waterproof IPx4
Temperature (Operation):	-20°C to +50°C


LIGHT CURVE AND RUNTIMES

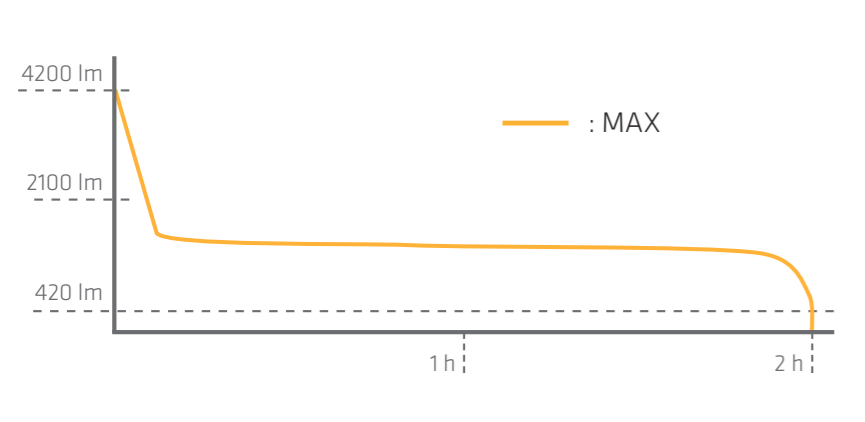

MAX
4200 LUMENS
420
2 h

DIMMING
1000 LUMENS
6
2⁴⁵-600 h

WHAT'S IN THE BOX

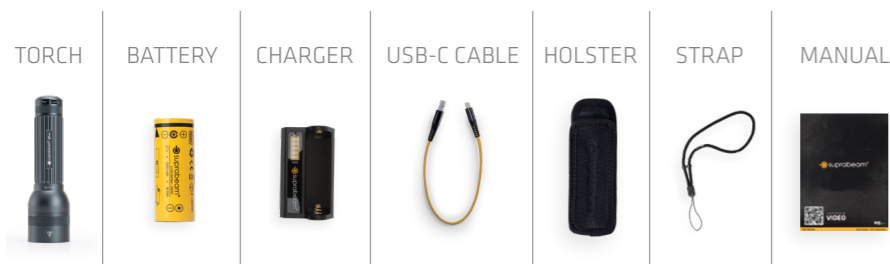

DIMENSIONS



www.suprabeam.com

ELECTRONICS

Built in Controller:	Yes, DIM and STEP mode
Standard Power Source:	Li-ion 26650 (5000 mAh)
Charging Time:	80% = 3 h, 100% = 4 h 30 min
Beam / Distance:	Variable from Spot to Floodlight / 440 Meters
Luminous Flux:	Max: 4200 lm, Dimmable: 1000 lm - 6 lm
Lighting Time:	Max: 2 h / High dim: 2 h 45 min / Low dim: 600 h
Accessories Included:	Holster, Strap, USB-C cable and external ICR 26650 Charger
Charging Temperature:	-0°C to +45°C