

 suprabeam®

E1



120  
LUMENS



2 x AAA



60 m



50 g



20°

Distributor's Stamp:

Suprabeam is manufactured by  
the Steiner Group and distributed  
worldwide by:

Steiner A/S  
Dyssen 3  
DK-8200 Aarhus N, Denmark

Phone: +45 87 525 212  
[www.suprabeam.com](http://www.suprabeam.com)  
[info@suprabeam.com](mailto:info@suprabeam.com)

511.2005

## KEY FEATURES / UNIQUE SELLING POINTS (USP)



### TURN AND TOUCH SWITCH

The switch allows the user to turn on a constant light or touch and hold for a quick inspection light, when the switch is slightly turned.



### RUGGED DESIGN

The E1 is built for your essential needs and the rugged design makes it durable in almost every situation. Take the E1 with you everywhere and trust it to be your durable companion.



### WATERPROOF - IPX8


The E1 is rated IPX8, which means it is waterproof down to 1 meter. Use the E1 in all weather conditions without being concerned about your light.



### ATTACHMENT CLIP

With the E1 attachment clip and the convenient size the E1 is perfect for carrying in your pocket. The attachment clip secures the E1 in your pocket and makes it easy to reach with a quick grasp.

## LIGHT CURVE AND RUNTIMES

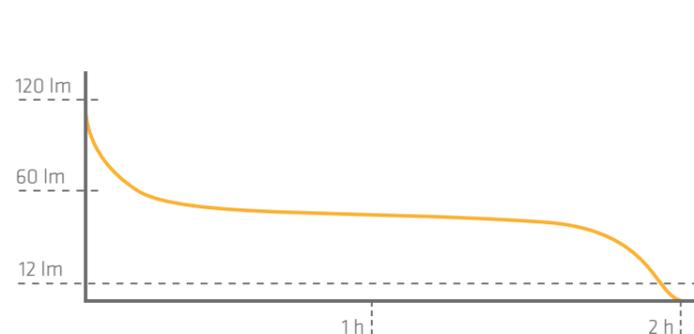

120 LUMENS 12 2 h

## WHAT'S IN THE BOX

TORCH



BATTERY



MANUAL



## DIMENSIONS



www.suprabeam.com

## PACKAGING



### PACKAGING

<b>Customs Tariff Number:</b>	8513 1000
<b>Packaging:</b>	PET Packaging
<b>Single Box Content / Size / Weight:</b>	1 pcs, height/width/depth, 17.8 x 5.5 x 2.1 cm / 62 g
<b>Master Box Content / Size / Weight:</b>	20 pcs, 29 x 19.7 x 18.6 / 1.75 kg
<b>Part. No.:</b>	511.1005
<b>EAN-CODE:</b>	5704049905603

## SPECIFICATIONS

<b>LED / Focus Configuration:</b>	1 CREE Power Chip / Fixed 20° Spot
<b>Case Material / Surface Treatment:</b>	Prime Aluminium quality 6061, anodized
<b>Case Color:</b>	Black
<b>Switch at Rear:</b>	Turn/Touch-Switch At Rear
<b>Dimensions:</b>	L: 127 mm, ø: 15 mm
<b>Weight incl. Battery:</b>	50 g
<b>Ingress Protection Rating:</b>	Waterproof (down to 1m) IPx8
<b>Temperature (Operation):</b>	-20°C to +50°C

## ELECTRONICS

<b>Built in Controller:</b>	Yes
<b>Standard Power Source:</b>	2 x AAA Alkaline
<b>Compatible with Rechargeable Cells:</b>	Yes, with AAA NiMH 1.2V
<b>Beam / Distance:</b>	Fixed Spot / 60 Meters
<b>Luminous Flux:</b>	120 lm
<b>Lighting Time:</b>	2 h
<b>Accessories Included:</b>	Attachment Clip