





ACCESSORIES

PRODUCT	DESCRIPTION	PARTNUMBER	WEIGHT	SINGLE BOX SIZE	EAN CODE
	Battery: Li-Ion cell 18650 with USB (3000 mAh - Q3r)	951.023	54 g	L: 17.0 cm, W: 11.0 cm, H: 4.5 cm	5704049907898
	Color filter Set B/R/Y/G with adapter (for Q3/V3)	950.014	24 g	L: 17.0 cm, W: 11.0 cm, H: 4.5 cm	5704049901230
	Helmet: Adapter mount for torch - Universal	950.070	44 g	L: 17.0 cm, W: 11.0 cm, H: 5 cm	5704049905092
	Helmet adapter: Fast rail military helmet (Q3/Q7 series)	950.072	32 g	L: 17.0 cm, W: 11.0 cm, H: 5 cm	5704049905115
	Bike holder Q3/Q4/Q7 series	950.012	48 g	L: 17.0 cm, W: 11.0 cm, H: 5.5 cm	5704049904491
	Camping bulb Q3/V3 series	950.028	28 g	L: 7.0 cm, W: 6.5 cm, H: 3.5 cm	5704049901346



SPAREPARTS

PRODUCT	DESCRIPTION	PARTNUMBER	EAN CODE
	Nylon pouch for SUPRABEAM Q3r	995.0017	5704049900400
	Switch complete for SUPRABEAM Q3r	995.0142	5704049907959
	Replacement Lense for Q3r, complete	995.0141	5704049907942

995.0141



995.0142

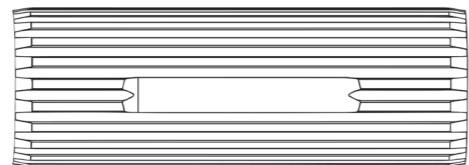

Distributor's Stamp:

Suprabeam is manufactured by the Steiner Group and distributed worldwide by:

Steiner A/S
Dyssen 3
DK-8200 Aarhus N, Denmark

Phone: +45 87 525 212
www.suprabeam.com
info@suprabeam.com

suprabeam®

Q3r

**NEW
2020**
VERSION WITH:

WATER- AND DUSTPROOF - IP68 (2m)

SMART FUNCTION WITH ELECTRONIC DIMMING + MEMORY

DC CONVERTER TECHNOLOGY FOR 50 % LONGER RUNTIME



1100 LUMENS


Li-ion
3000 mAh



200 m


130 g


15° - 70°

503.5211

KEY FEATURES / UNIQUE SELLING POINTS (USP)



WATER- AND DUSTPROOF - IP68

Tested according to IP68 ensures water proof (2m) and dustproof protection. Designed for trouble-free usage in the field even in wet, dirty or dusty conditions.



3000 mAh BATTERY WITH USB

The rechargeable 3'000 mAh Li-Ion battery offers USB integrated charging. Purchase a second battery and charge one battery whilst using the torch with the other battery. True continuous operation



DC CONVERTER TECHNOLOGY

Our latest DC converter technology offers highest performance and efficiency. It reduces the heat of the LED and decreases the energy consumption. Up to 50 % longer runtime!



DIMMING + MEMORY

The electronic task switch combined with our new dimming control, offers simple and stepless power adjustment. It memorizes the last used light output and one single click activates maximum power again.



ERGONOMIC TASK SWITCH

The ergonomic task switch is easy to operate and gives you a tactile feedback. The switch and the solid silicone cover are designed for extreme long lifetime.



ROTATING HYPERFOCUS™

The rotating Hyperfocus™ offers instant change from floodlight to spotlight by turning the lamp-head. Simple single hand control of the light beam with two fingers.


PACKAGING



PACKAGING

Customs Tariff Number:	8513 1000
Packaging:	Recyclable Cardboard Packaging
Single Box Content / Size / Weight:	1 pcs, height/width/depth: 20 x 15 x 6 cm / 383 g
Master Box Content / Size / Weight:	12 pcs, height/width/depth: 22.7 x 31.5 x 37.5 cm / 5.1 kg
Part. No.:	503.5211
EAN-CODE:	5704049908277

LIGHT CURVE AND RUNTIMES

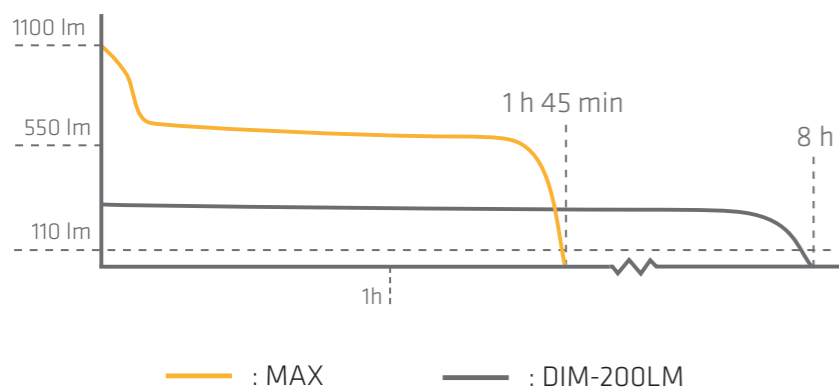

MAX	1100 LUMENS 110	1 h 45 min
DIMMING	600 LUMENS 6	2-300 h
DIM-200LM	200 LUMENS 20	8 h

SPECIFICATIONS

LED / Focus Configuration:	1 CREE Power Chip / Rotating Hyperfocus™
Case Material / Surface Treatment:	Prime Aluminium quality 6061, anodized
Case Color:	Anthracite Dark Grey
Switch at Rear:	Electronic Switch with Solid Silicone Button
Dimensions:	L: 122 mm, ø: 26.5 mm
Weight incl. Battery:	130 g
Ingress Protection Rating:	Waterproof (2m) and Dust proof IP68
Temperature (Operation):	-20°C to +50°C

ELECTRONICS

Built in Controller:	Yes, dimmable
Standard Power Source:	Li-ion 18650 (3000 mAh) with USB
Charging Time:	80% = 3 h 35 min, 100% = 4 h 55 min
Beam / Distance:	Variable from Spot to Floodlight / 200 Meters
Luminous Flux:	Max: 1100 lm / Dim: 600-6 lm
Lighting Time:	Max: 1 h 45 min / Low Dim: 300 h
Accessories Included:	Pouch with Nylon Fastener and Press Stud, Strap, USB-Cable
Charging Temperature:	-0°C to +45°C

WHAT'S IN THE BOX



DIMENSIONS

