


## ACCESSORIES

PRODUCT	DESCRIPTION	PARTNUMBER	WEIGHT	SINGLE BOX SIZE	EAN CODE
	Battery: Li-Ion cell 18650 (2'200 mAh - Q3r/Q4xr)	950.010	54 g	L: 17.0 cm, W: 11.0 cm, H: 4.5 cm	5704049900219
	Charging station for Li-ion 18650 (for Q4xr)	995.0061	26 g	L: 8.5 cm, W: 5.0 cm, H: 2.5 cm	5704049901360
	Bike holder Q3/Q4/Q7 series	950.012	48 g	L: 17.0 cm, W: 11.0 cm, H: 5.5 cm	5704049904491
	Car USB-Charger: 5V/1A	995.0063	34 g	L: 17.0 cm, W: 11.0 cm, H: 3 cm	5704049901384

## SPAREPARTS

PRODUCT	DESCRIPTION	PARTNUMBER	EAN CODE
	Nylon pouch for SUPRABEAM Q4xr	995.0070	5704049904286
	Switch complete for SUPRABEAM Q4xr	995.0073	5704049904316
	Replacement Lens for Q4xr, complete	995.0076	5704049904385

995.0076

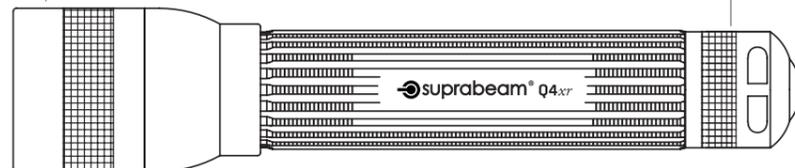


995.0073

Distributor's Stamp:

Suprabeam is manufactured by the Steiner Group and distributed worldwide by:

Steiner A/S  
Dyssen 3  
DK-8200 Aarhus N, Denmark

Phone: +45 87 525 212  
[www.suprabeam.com](http://www.suprabeam.com)  
[info@suprabeam.com](mailto:info@suprabeam.com)

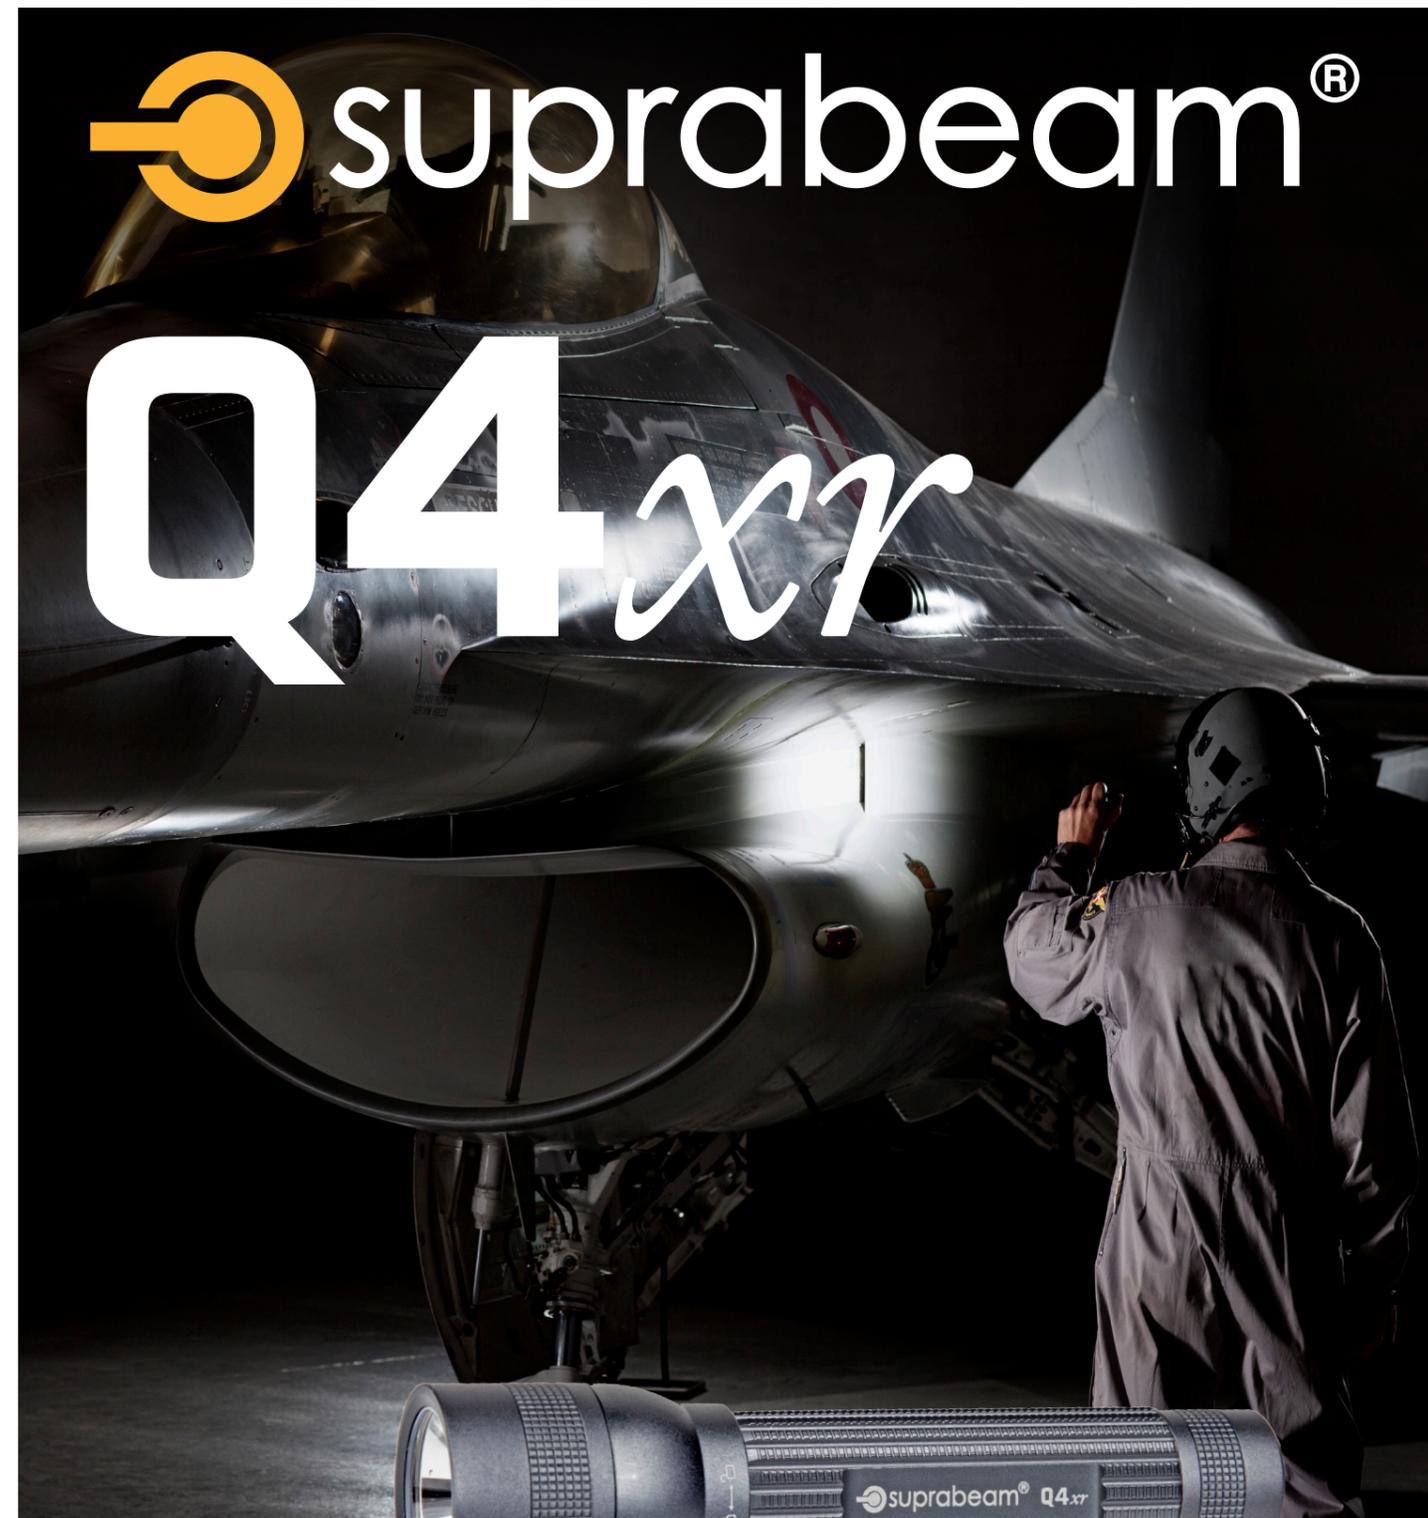

# 800 LUMENS



2 x Li-ion  
2200 mAh



250 m



132 g



10° - 70°

504.6105

## KEY FEATURES / UNIQUE SELLING POINTS (USP)



### SLIDING HYPERFOCUS™

The sliding Hyperfocus™ optical system collects the LED radiance and distributes it with maximum efficiency from a perfect round floodlight beam to a highly intensive, long range spot beam. All just by one-hand sliding of the head.



### FOCUS LOCK

When the torch is slid to Focus, simply turn the head a couple of degrees to the left to enable the lock-function. This will engage a brake-function which will prevent unwanted sliding from focus to flood beam.



### USB FAST CHARGING BASE

Connected by standard Micro USB and with our 5V/2A, 100 - 240VAC power adapter it charges the Li-Ion cell at maximum rate. With or without USB power it shows the battery status on a 5-LED light stripe at any time.



### PROFESSIONAL POUCH

Keep your Q4xr within grasp at all times with the included belt pouch. With the sturdy and reliable nylon fastener, there is no need to worry about your Q4xr falling out.



### SPARE BATTERY - 18650

With two 2200 mAh batteries included as a standard, you can charge one battery externally while using the other in the torch. This gives you the freedom to use the torch without interruption, and you won't have to worry about discontinuing the use of the torch to charge the battery.



### WATER RESISTANT - IPX4

The Q4xr is rated IPX4, which means it is water resistant. Use the Q4xr in all weather conditions without having to worry about your light.

## PACKAGING




### PACKAGING



### PE PORTABLE BOX WITH SPACE FOR SECOND BATTERY

<b>Customs Tariff Number:</b>	8513 1000
<b>Packaging:</b>	PE Portable Box with Space for Second Battery
<b>Single Box Content / Size / Weight:</b>	1 pcs, 25 x 21 x 7 cm / 975 g
<b>Master Box Content / Size / Weight:</b>	8 pcs, 41 x 41 x 28 cm / 6.5 kg
<b>Part. No.:</b>	504.6105
<b>EAN-CODE:</b>	5704049902626

## LIGHT CURVE AND RUNTIMES

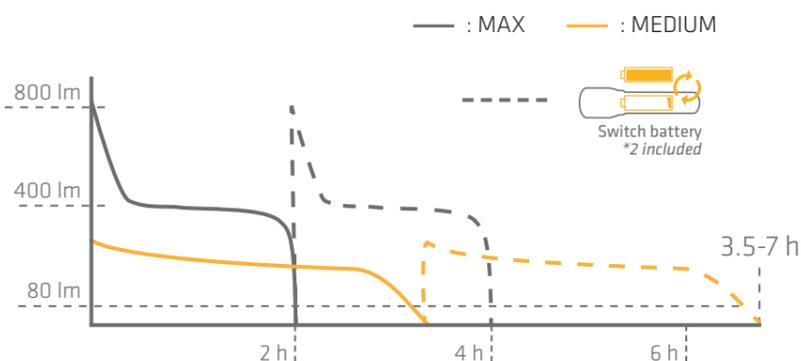

MAX	800 LUMENS 80	2 h	x2
HIGH	350 LUMENS 35	2 h 15 min	x2
MEDIUM	200 LUMENS 20	3 h 30 min	x2
LOW	50 LUMENS 5	24 h	x2

## WHAT'S IN THE BOX



## DIMENSIONS



www.suprabeam.com

## SPECIFICATIONS

<b>LED / Focus Configuration:</b>	1 CREE Power Chip / Sliding Hyperfocus™
<b>Case Material / Surface Treatment:</b>	Prime Aluminium quality 6061, anodized
<b>Case Color:</b>	Anthracite Dark Grey
<b>Switch at Rear:</b>	Quality Tested Metal Switch With Touch Function
<b>Dimensions:</b>	L: 134 mm, ø: 32 mm
<b>Weight incl. Battery:</b>	132 g
<b>Ingress Protection Rating:</b>	Splash Waterproof IPX4
<b>Temperature (Operation):</b>	-20°C to +35°C

## ELECTRONICS

<b>Built in Controller:</b>	Yes, 5-step controller by press or touch
<b>Standard Power Source:</b>	Li-ion 18650 (2200 mAh), 2 pcs. included
<b>Charging Time:</b>	80% = 1 h 20 min, 100% = 2 h 40 min
<b>Beam / Distance:</b>	Variable from Spot to Floodlight / 250 Meters
<b>Luminous Flux:</b>	Max: 800 lm / High: 350 lm / Medium: 200 lm / Low: 50 lm
<b>Lighting Time:</b>	Max: 2 h / High: 2 h 15 min / Medium: 3 h 30 min / Low: 24 h
<b>Accessories Included:</b>	Pouch with Nylon Fastener and Press Stud, Strap, Adapter, USB-Cable, External Charger
<b>Charging Temperature:</b>	-0°C to +45°C