


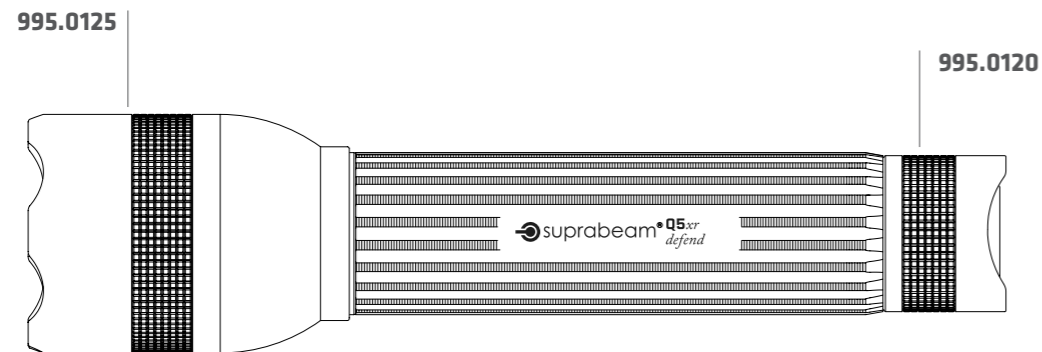


ACCESSORIES

PRODUCT	DESCRIPTION	PARTNUMBER	WEIGHT	SINGLE BOX SIZE	EAN CODE
	Battery: Li-Ion cell 18650 (3'300 mAh - Q5xr defend)	950.016	52 g	L: 17.0 cm, W: 11.0 cm, H: 4.5 cm	5704049905931
	Wall charging station (for Q5xr / Q5xr defend)	995.0116	48 g	L: 5.0 cm, W: 7.0 cm, H: 6.0 cm	5704049907195
	Color filter Set B/R/Y/G with adapter (for Q5xr)	950.015	36 g	L: 7 cm, W: 6.5 cm, H: 3.5 cm	5704049901247
	Traffic Cone Orange	950.081	50 g	L: 18.0 cm, W: 4.5 cm, H: 4.5 cm	5704049907256
	Traffic Cone Yellow	950.087	50 g	L: 18.0 cm, W: 4.5 cm, H: 4.5 cm	5704049907485

SPAREPARTS

PRODUCT	DESCRIPTION	PARTNUMBER	EAN CODE
	Nylon pouch for SUPRABEAM Q5xr defend	995.0099	5704049905979
	Switch complete for SUPRABEAM Q5xr defend	995.0120	5704049907324
	Replacement Lense for Q5xr defend, complete	995.0125	5704049907379



Distributor's Stamp:

Suprabeam is manufactured by the Steiner Group and distributed worldwide by:

Steiner A/S
Dyssen 3
DK-8200 Aarhus N, Denmark


Phone: +45 87 525 212
www.suprabeam.com
info@suprabeam.com

suprabeam®

Q5xr defend

1000 LUMENS


Li-ion
3300 mAh


280 m


182 g


12° - 70°


505.7005

KEY FEATURES / UNIQUE SELLING POINTS (USP)



SMART INTERNAL CHARGING

The USB connected charger for the Q5xr defend is designed to be mounted hanging on a wall or installed in a vehicle, making it effortless to hang in your Q5xr for charging.



PROGRAMMABLE

The Q5xr defend offers two modes, one goes from Max to Low, the other one goes from Low to Max. You can easily switch between the two programs, so that you can choose the mode that fits the task at hand. Besides the two modes the Q5xr defend is equipped with an instant strobe function.



TACTICAL FRONT AND BACK

Use the strike bezel for self-defense or as an easy way to locate your torch in the dark. When switched on and placed upside down on a table, it will light up around the tip of the head. The tactical tail cap is carefully shaped so that it can be used to break light surfaces. You will also be able to use it for self-defense.



HIGH CAPACITY BATTERY

The battery inside the Q5xr defend is a high capacity 18650 Li-ion cell with 3300 mAh of capacity. The large battery capacity is essential as the battery is charged inside the torch, and therefore it is able to power the light for a long time before it needs recharging.



SLIDING HYPERFOCUS™

The sliding Hyperfocus™ optical system collects the LED radiance and distributes it with maximum efficiency from a perfect round floodlight beam to a highly intensive, long range spot beam. All just by one-hand sliding of the head.



FOCUS LOCK

When the torch is slid to Focus, simply turn the head a couple of degrees to the left to enable the lock-function. This will engage a brake-function which will prevent unwanted sliding from focus to flood beam.


PACKAGING



PACKAGING

Customs Tariff Number:	8513 1000
Packaging:	PE Portable Box
Single Box Content / Size / Weight:	1 pcs, 25 x 21 x 7 cm / 716 g
Master Box Content / Size / Weight:	6 pcs, 38x 35 x 24 cm / 5.2 kg
Part. No.:	505.7005
EAN-CODE:	5704049906785

LIGHT CURVE AND RUNTIMES

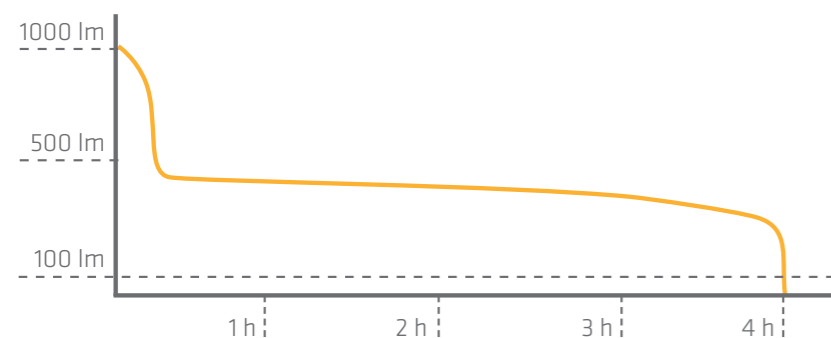


MAX	1000 LUMENS 100	4 h
MEDIUM	200 LUMENS 20	7 h 15 min
LOW	50 LUMENS 5	37 h

SPECIFICATIONS

LED / Focus Configuration:	1 CREE Power Chip / Sliding Hyperfocus™
Case Material / Surface Treatment:	Prime Aluminium quality 6061, anodized
Case Color:	Black
Switch at Rear:	Electronic Switch with Solid Silicone Button
Dimensions:	L: 161 mm, ø: 39 mm
Weight incl. Battery:	182 g
Ingress Protection Rating:	Splash Waterproof IPx4
Temperature (Operation):	-20°C to +35°C

WHAT'S IN THE BOX

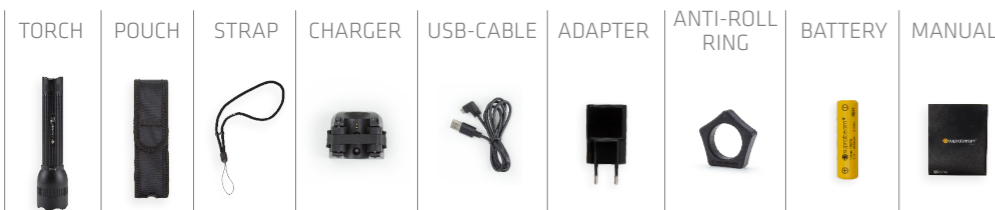

DIMENSIONS



ELECTRONICS

Built in Controller:	Yes, 4-step controller by press or touch, 2 modes
Standard Power Source:	Li-ion 18650 (3300 mAh)
Charging Time:	80% = 2 h, 100% = 3 h 40 min
Beam / Distance:	Variable from Spot to Floodlight / 280 Meters
Luminous Flux:	Max: 1000 lm / Medium: 200 lm / Low: 50 lm / Strobe 10 Hz
Lighting Time:	Max: 4 h / Medium: 7 h 15 min / Low: 37 h
Accessories Included:	Pouch with Magnet, Strap, Anti-Roll Ring, Adapter, USB-Cable, Wall Charger
Charging Temperature:	-0°C to +45°C