








## ACCESSORIES

PRODUCT	DESCRIPTION	PARTNUMBER	WEIGHT	SINGLE BOX SIZE	EAN CODE
	Battery: Li-Ion cell 26650 (5'000 mAh - Q7xr)	951.012	94 g	L: 17.0 cm, W: 11.0 cm, H: 4.5 cm	5704049900547
	Charging station for Li-ion 26650 (for Q7xr)	995.0062	26 g	L: 8.5 cm, W: 5.0 cm, H: 2.5 cm	5704049901377
	Bike holder Q3/Q4/Q7 series	950.012	48 g	L: 17.0 cm, W: 11.0 cm, H: 5.5 cm	5704049904491
	Color filter Set B/R/Y/G with adapter	950.030	42 g	L: 7.0 cm, W: 6.5 cm, H: 3.5 cm	5704049904415
	Car USB-Charger: 5V/1A	995.0063	34 g	L: 17.0 cm, W: 11.0 cm, H: 3 cm	5704049901384


## SPAREPARTS

PRODUCT	DESCRIPTION	PARTNUMBER	EAN CODE
	Nylon pouch for SUPRABEAM Q7xr/Q7xrs	995.0032	5704049900646
	Switch complete for SUPRABEAM Q7xr	995.0012	5704049900318
	Replacement Lense for Q7xr, complete	995.0041	5704049907768

995.0041



995.0012

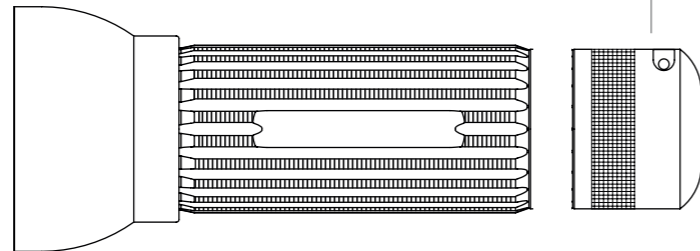

Distributor's Stamp:

Suprabeam is manufactured by the Steiner Group and distributed worldwide by:

Steiner A/S  
Dyssen 3  
DK-8200 Aarhus N, Denmark

Phone: +45 87 525 212  
[www.suprabeam.com](http://www.suprabeam.com)  
info@suprabeam.com

 **suprabeam**®

**Q7xr**



**1000  
LUMENS**



2 x Li-ion  
5000 mAh



345 m



307 g



10° - 75°

507.6105

## KEY FEATURES /UNIQUE SELLING POINTS (USP)



### 2 X 5000 mAh LI-ION BATTERIES

With two 5000 mAh batteries included as a standard, you can charge one battery externally while using the other in the torch. This gives you the freedom to use the torch without interruption.



### SLIDING HYPERFOCUS™

The sliding Hyperfocus™ optical system collects the LED radiance and distributes it with maximum efficiency from a perfect round floodlight beam to a highly intensive, long range spot beam. All just by one-hand sliding of the head.




### USB FAST CHARGING BASE

Connected by standard Micro USB and with our 5V/2A, 100 - 240VAC power adapter it charges the Li-Ion cell at maximum rate. With or without USB power it shows the battery status on a 5-LED light stripe at any time.



### PROFESSIONAL POUCH

Keep your Q7xr within grasp at all times with the included belt pouch. With the sturdy and reliable nylon fastener, there is no need to worry about your Q7xr falling out.

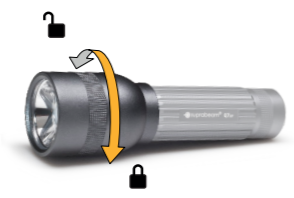

### FOCUS LOCK

When the torch is slid to Focus, simply turn the head a couple of degrees to the left to enable the lock-function. This will engage a brake-function which will prevent unwanted sliding from focus to flood beam.



### WATER RESISTANT - IPX4

The Q7xr is rated IPX4, which means it is water resistant. Use the Q7xr in all weather conditions without having to worry about your light.

## PACKAGING




### PACKAGING



### PE PORTABLE BOX WITH SPACE FOR SECOND BATTERY

<b>Customs Tariff Number:</b>	8513 1000
<b>Packaging:</b>	PE Portable Box with Space for Second Battery
<b>Single Box Content / Size / Weight:</b>	1 pcs, 28 x 23 x 8 cm / 960 g
<b>Master Box Content / Size / Weight:</b>	6 pcs, 41 x 41 x 28 cm / 6.65 kg
<b>Part. No.:</b>	507.6105
<b>EAN-CODE:</b>	5704049903289

## LIGHT CURVE AND RUNTIMES

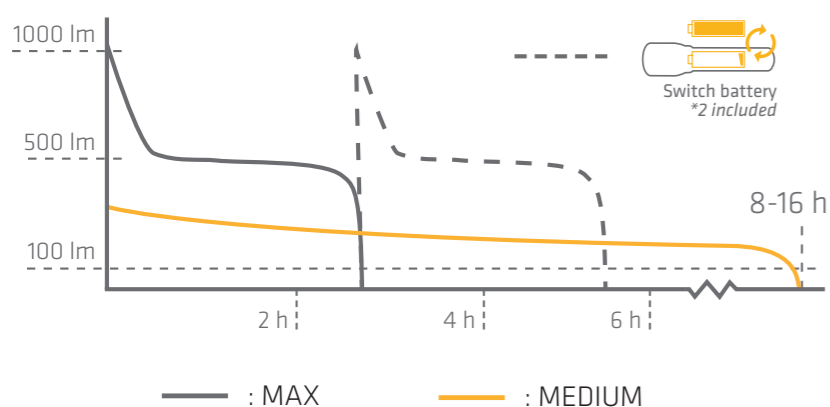

MAX	1000 LUMENS 100	2 h   45 min	x2
HIGH	500 LUMENS 50	3 h   35 min	x2
MEDIUM	250 LUMENS 25	8 h	x2
LOW	50 LUMENS 5	37 h	x2

## WHAT'S IN THE BOX



## DIMENSIONS



www.suprabeam.com

## SPECIFICATIONS

<b>LED / Focus Configuration:</b>	1 CREE Power Chip / Sliding Hyperfocus™
<b>Case Material / Surface Treatment:</b>	Prime Aluminium quality 6061, anodized
<b>Case Color:</b>	Anthracite Dark Grey
<b>Switch at Rear:</b>	Electronic Switch with Solid Silicone Button
<b>Dimensions:</b>	L: 150 mm, Ø: 46 mm
<b>Weight incl. Battery:</b>	307 g
<b>Ingress Protection Rating:</b>	Splash Waterproof IPx4
<b>Temperature (Operation):</b>	-20°C to +35°C

## ELECTRONICS

<b>Built in Controller:</b>	Yes, 5-step controller by press or touch
<b>Standard Power Source:</b>	Li-ion 26650 (5000 mAh) 2 pcs. included
<b>Charging Time:</b>	80% = 2 h 30 min, 100% = 4 h 30 min
<b>Beam / Distance:</b>	Variable from Spot to Floodlight / 345 Meters
<b>Luminous Flux:</b>	Max: 1000 lm / High: 500 lm / Medium: 250 lm / Low: 50 lm
<b>Lighting Time:</b>	Max: 2 h 45 min / High: 3 h 35 min / Medium: 8 h / Low: 37 h
<b>Accessories Included:</b>	Pouch with Nylon Fastener and Press Stud, Strap, 100-240VAC Adaptor with USB cable and external ICR 26650 Charger
<b>Charging Temperature:</b>	-0°C to +45°C