

SPAREPARTS

PRODUCT	DESCRIPTION	PARTNUMBER	EAN CODE
	Switch complete for SUPRABEAM Q1	995.0008	5704049900271
1	Pocket clip for Q1	995.0035	5704049900981

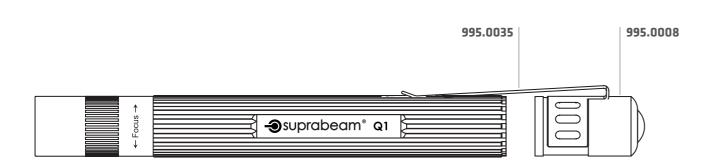

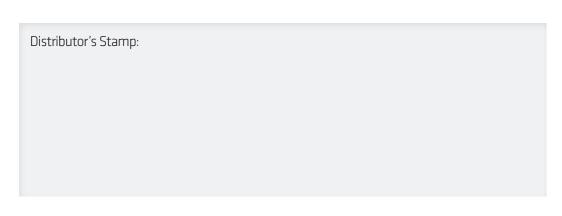

Suprabeam is manufactured by the Steiner Group and distributed worldwide by:

Steiner A/S Dyssen 3 DK-8200 Aarhus N, Denmark

Phone: +45 87 525 212 **www.suprabeam.com** info@suprabeam.com



KEY FEATURES / UNIQUE SELLING POINTS (USP)



ROTATING HYPERFOCUS

The rotating Hyperfocus™ lets you go from flood to spot with a light turn of the lamphead. Control the focus with two fingers and switch quickly from 10 degrees to 70 degrees.



ATTACHMENT CLIP

With the Q1 attachment clip and the convenient size the Q1 is perfect for carrying in your pocket. The attachment clip secures the Q1 in your pocket and makes it easy to reach with a quick grasp.



INTELLIGENT LIGHT CONTROL

The advanced electronic micro controller offers switching between high and low light power by a simple switch operation. In addition, it controls the light output for an optimized battery lifetime.



The Q1 is rated IPX4, which means it is water resistant. Use the Q1 in all weather conditions without having to worry about your light.



TOUCH SWITCH

The endcap metal button is a switch with a task function, allowing you to step through the light modes without activating the lamp constantly. The different light functions are provided by our Intelligent Light Control circuit

PACKAGING







PACKAGING

REUSABLE LABEL

PRESENTATION

Customs Tariff Number:	8513 1000
Packaging:	Presentation tube
Single Box Content / Size / Weight:	1 pcs, height/diameter, 15,8 x 6.5 cm / 144 g
Master Box Content / Size / Weight:	72 pcs, 40 x 41 x 36.5 cm / 9.1 kg
Part. No.:	501.300
EAN-CODE:	570404990174:


SPECIFICATIONS


LED / Focus Configuration:	1 CREE Power Chip / Rotating Hyperfocus
Case Material / Surface Treatment:	Prime Aluminium quality 6061, anodized
Case Color:	Anthracite Dark Gre
Switch at Rear:	Quality Tested Metal Switch With Touch Functio
Dimensions:	L: 144 mm, ø: 15 mr
Weight incl. Battery:	56
Ingress Protection Rating:	Splash Waterproof IPx
Temperature (Operation):	-20°C to +50°

ELECTRONICS


Built in Controller:	Yes, 2-step controller by press or touch
Standard Power Source:	2 x AAA Alkaline
Compatible with Rechargeable Cells:	Yes, with AAA NiMh 1.2V
Beam / Distance:	Variable from Spot to Floodlight / 70 Meters
Luminous Flux:	High: 160 lm / Low: 40 lm
Lighting Time:	High: 4 h. / Low: 10 h
Accessories Included:	Attachment Clip

LIGHT CURVE AND RUNTIMES

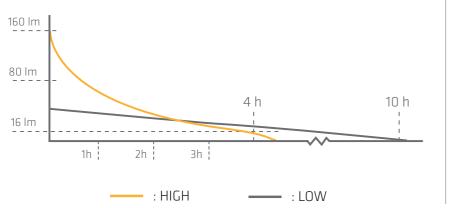



WHAT'S IN THE BOX













DIMENSIONS



www.suprabeam.com