





Li-Po 1100 mAh



asuprabeam® q2,

175 m



67 g



10° - 70°



## **PACKAGING**



# **450**LUMENS

## **SPECIFICATIONS**









1100 mAh

175 m

67 g

## WHAT'S IN THE BOX













# UNIQUE SELLING POINTS (USP)



# PROTECTED INTERNAL USB CHARGING

Compatible with USB. This enables you to charge everywhere, either with our 5V/2A adapter, through your computer or with a car charger. Charge up to 80% in only 1h 45min. The micro USB Port is protected by a high speed twist cover.



### HIGH POWER LI-PO BATTERY

With the high power 1100 mAh Li-Po battery you get more than 50% higher capacity than a comparable standard AA Li-Ion battery.



#### **DIMMING + MEMORY**

The new electronic task switch combined with our new dimming control, offers simple and stepless power adjustment from 250 down to 6 lumens. It memorizes the last used light output and with one single click it activates maximum power again.



#### SLIDING HYPERFOCUS™

Focus from wide floodlight to narrow spot light. With the sliding Hyperfocus™ optical system it is easy to get the correct light output with a minimum loss of light. Just slide the head of the torch for the correct light setting and you are good to go.



#### **ERGONOMIC TASK SWITCH**


The tactile ergonomic task switch is easy to operate and gives you a tactile feedback. The electronic task switch with solid silicone cover is specially designed to have a long lifetime.



#### INTELLIGENT LIGHT CONTROL

The advanced electronic micro controller offers dimming of the light power by simple switch operation. In addition, it controls the light output for optimized battery lifetime.

# LIGHT CURVE AND RUNTIMES

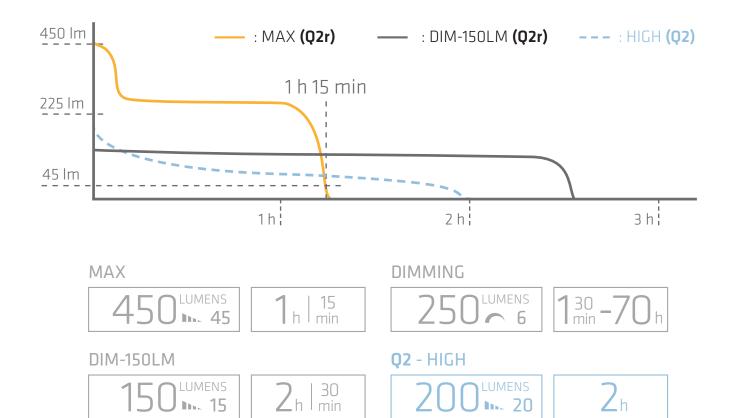

## **SPECIFICATIONS**

LED / Focus configuration:	1 CREE Power Chip / Sliding Hyperfocus™
Case Material / Surface Treatment:	Anodized, High Strength Aluminium
Case Color:	Anthracite Dark Grey
Switch at rear:	Electronic Task Switch With Solid Silicone Cover
Dimensions:	L: 116mm, ø: 26mm
Weight incl. battery:	67g
Ingress Protection Rating:	Splash Waterproof IPx4
Temperature (Operation):	-20°C to +50°C

# **ELECTRONICS**

Built in Controller:	Yes, DIM and STEP mode
Standard Power Source:	1 x Li-Po (1100 mAh)
Beam / Distance:	Variable from Spot to Floodlight / 175 Meters
Luminous Flux:	Max: 450 lm / Dim: 250-6 lm
Lighting Time:	Max: 1 h 15m. / Low dim: 70 h.
Accessories included:	Pro. Quality Pouch with Velcro and Press Stud, USB-Cable
Charging time:	To 80%: 1h 45m To 100% : 3h 15m
Charging temperature:	0°C - +45°C

# **PACKAGING**

Customs Tariff Number:	8513 1000
Packaging:	Presentation tube
Single Box Content / Size / Weight:	1 pcs, height/diameter, 18 x 8.5 cm / 283 g
Master Box Content / Size / Weight:	32 pcs, 35 x 35 x 40 cm / 9,05 kg
Order's Address:	info@suprabeam.com
Part. No.:	502.5005
EAN-CODE:	5704049907508





PRESENTATION TUBE

**REUSABLE LABEL** 

## **FEATURES**



#### INTELLIGENT LIGHT CONTROL (ILC)

Our intelligent light control lets you switch between different light outputs



#### **COOLING CORE**

The high strength aluminium cooperates with the "heatsink" to cool off the LED



#### **ELECTRONIC DIMMING**

Our eletronic dimming lets you dim the light to the desired level with ease



#### WATER RESISTENT - IPX4

This IP-rating indicates that your product is water resistant



#### **SLIDING FOCUS**

Focus from wide floodlight to narrow spot light with the one handed sliding focus



#### RECHARGEABLE

Rechargeable products will prevent you from using and throwing away alkaline batteries



#### **USB CHARGER**

All of our rechargeable products are compatible with USB. This enables you to charge everywhere

# RECOMMENDED ACCESSORIES



## COLOUR FILTERS

High quality filters for night operations. Compatible with Q2, Q3-series and V-series with the colour filter adapter.



## 12/24V -1A USB CHARGER

With the 12/24V, 1 Amp USB charger you can recharge your rechargeable Suprabeam products while you are on the go.



## 230VAC / 10W USB ADAPTER

With this premium quality wall adapter, you can charge your rechargeable Suprabeam light directly from the plug.