






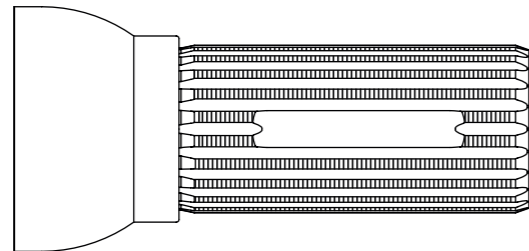

## ACCESSORIES

PRODUCT	DESCRIPTION	PARTNUMBER	WEIGHT	SINGLE BOX SIZE	EAN CODE
	Battery: Li-Ion cell 26650 (5'000 mAh - Q7xr + Q7xrs)	951.021	94 g	L: 17.0 cm, W: 11.0 cm, H: 4.5 cm	5704049907614
	Charging station for Li-ion 26650 (for Q7xr)	995.0062	26 g	L: 8.5 cm, W: 5.0 cm, H: 2.5 cm	5704049901377
	Bike holder Q3/Q4/Q7 series	950.012	48 g	L: 17.0 cm, W: 11.0 cm, H: 5.5 cm	5704049904491
	Color filter Set B/R/Y/G with adapter	950.030	42 g	L: 7.0 cm, W: 6.5 cm, H: 3.5 cm	5704049904415
	Car USB-Charger: 5V/1A	995.0063	34 g	L: 17.0 cm, W: 11.0 cm, H: 3 cm	5704049901384


## SPAREPARTS

PRODUCT	DESCRIPTION	PARTNUMBER	EAN CODE
	Nylon pouch for SUPRABEAM Q7xr/Q7xrs	995.0032	5704049900646
	Switch complete for SUPRABEAM Q7xrs	995.0133	5704049907751
	Replacement Lense for Q7xrs, complete	995.0134	5704049907768

995.0134



995.0133



Distributor's Stamp:

Suprabeam is manufactured by the Steiner Group and distributed worldwide by:

Steiner A/S  
Dyssen 3  
DK-8200 Aarhus N, Denmark

Phone: +45 87 525 212  
[www.suprabeam.com](http://www.suprabeam.com)  
[info@suprabeam.com](mailto:info@suprabeam.com)

# suprabeam®

# Q7xrs



# 2000 LUMENS



2 x Li-ion  
5000 mAh



345 m



307 g



15° - 75°


507.6205

## KEY FEATURES /UNIQUE SELLING POINTS (USP)



### 2 X 5000 mAh LI-ION BATTERIES

With two 5000 mAh batteries included as a standard, you can charge one battery externally while using the other in the torch. This gives you the freedom to use the torch without interruption.



### DC CONVERTER TECHNOLOGY

The Q7xrs is fitted with our new and highly efficient electronic circuitry. It reduces the heat development of the Power LED and decreases the energy consumption. The advantage is 50 % longer runtimes and highest constant light output.



### USB FAST CHARGING BASE

Connected by standard Micro USB and with our 5V/2A, 100 - 240VAC power adapter it charges the Li-Ion cell at maximum rate. With or without USB power it shows the battery status on a 5-LED light stripe at any time.




### SLIDING HYPERFOCUS™

The sliding Hyperfocus™ optical system collects the LED radiance and distributes it with maximum efficiency from a perfect round floodlight beam to a highly intensive, long range spot beam. All just by one-hand sliding of the head.



### DIMMING + MEMORY

The new electronic task switch combined with our new dimming control, offers simple and stepless power adjustment from 1000 down to 6 lumens. It memorizes the last used light output and with one single click it activates maximum power again.



### FOCUS LOCK

When the torch is slid to Focus, simply turn the head a couple of degrees to the left to enable the lock-function. This will engage a brake-function which will prevent unwanted sliding from focus to flood beam.

## PACKAGING



### PACKAGING




### PE PORTABLE BOX WITH SPACE FOR SECOND BATTERY

<b>Customs Tariff Number:</b>	8513 1000
<b>Packaging:</b>	PE Portable Box with Space for Second Battery
<b>Single Box Content / Size / Weight:</b>	1 pcs, height/width/depth: 28 x 23 x 8 cm / 960 g
<b>Master Box Content / Size / Weight:</b>	5 pcs, height/width/depth: 26 x 30 x 40 cm / 5.5 kg
<b>Part. No.:</b>	507.6205
<b>EAN-CODE:</b>	5704049907522

## SPECIFICATIONS

<b>LED / Focus Configuration:</b>	1 CREE Power Chip / Sliding Hyperfocus™
<b>Case Material / Surface Treatment:</b>	Prime Aluminium quality 6061, anodized
<b>Case Color:</b>	Anthracite Dark Grey
<b>Switch at Rear:</b>	Electronic Switch with Solid Silicone Button
<b>Dimensions:</b>	L: 158 mm, ø: 46 mm
<b>Weight incl. Battery:</b>	307 g
<b>Ingress Protection Rating:</b>	Splash Waterproof IPx4
<b>Temperature (Operation):</b>	-20°C to +50°C

## LIGHT CURVE AND RUNTIMES

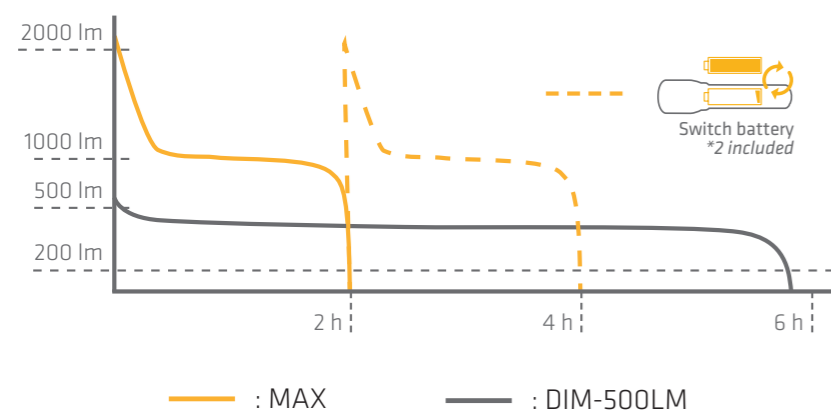

<b>MAX</b>	2000 LUMENS	2h	x2
<b>DIMMING</b>	1000 LUMENS	2 <sup>15</sup> -500h	x2
<b>DIM-500LM</b>	500 LUMENS	5h   50 min	x2

## WHAT'S IN THE BOX



## DIMENSIONS



www.suprabeam.com

## ELECTRONICS

<b>Built in Controller:</b>	Yes, DIM and STEP mode
<b>Standard Power Source:</b>	Li-ion 26650 (5000 mAh) 2 pcs. included
<b>Charging Time:</b>	80% = 2 h 30 min, 100% = 4 h 30 min
<b>Beam / Distance:</b>	Variable from Spot to Floodlight / 345 Meters
<b>Luminous Flux:</b>	Max: 2000 lm, Dimmable: 1000 lm - 6 lm
<b>Lighting Time:</b>	Max: 2 h / High dim: 2 h 15 min / Low dim: 500 h
<b>Accessories Included:</b>	Pouch with Nylon Fastener and Press Stud, Strap, 100-240VAC Adaptor with USB cable and external ICR 26650 Charger
<b>Charging Temperature:</b>	-0°C to +45°C