


## ACCESSORIES

PRODUCT	DESCRIPTION	PARTNUMBER	WEIGHT	SINGLE BOX SIZE	EAN CODE
	Battery: Li-Po cell 16600 (1100 mAh - Q2r)	951.020	30 g	L: 17.0 cm, W: 11.0 cm, H: 4.5 cm	5704049907607
	Color filter Set B/R/Y/G with adapter (for Q2/Q3/V3)	950.014	24 g	L: 7.0 cm, W: 6.5 cm, H: 3.5 cm	5704049901230

## SPAREPARTS

PRODUCT	DESCRIPTION	PARTNUMBER	EAN CODE
	Nylon pouch for SUPRABEAM Q2r	995.0025	5704049900561
	Switch complete for SUPRABEAM Q2r	995.0132	5704049907744
	Replacement Lense for Q2r, complete	995.0060	5704049901353

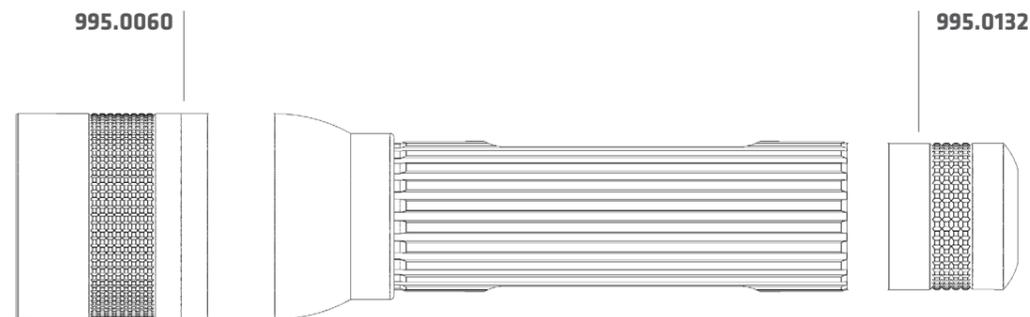

Distributor's Stamp:

Suprabeam is manufactured by the Steiner Group and distributed worldwide by:

Steiner A/S  
Dyssen 3  
DK-8200 Aarhus N, Denmark

Phone: +45 87 525 212  
[www.suprabeam.com](http://www.suprabeam.com)  
[info@suprabeam.com](mailto:info@suprabeam.com)



450  
LUMENS

  
Li-Po  
1100 mAh

  
175 m

  
67 g

  
10° - 70°

502.5011

## KEY FEATURES / UNIQUE SELLING POINTS (USP)



### PROTECTED INTERNAL USB CHARGING

Compatible with USB. This enables you to charge everywhere, either with our 5V/2A adapter, through your computer or with a car charger. Charge up to 80% in only 1h 45min. The micro USB Port is protected by a high speed twist cover.



### HIGH POWER LI-PO BATTERY

With the high power 1100 mAh Li-Po battery you get more than 50% higher capacity than a comparable standard AA Li-Ion battery.



### DIMMING + MEMORY

The new electronic task switch combined with our new dimming control, offers simple and stepless power adjustment from 250 down to 6 lumens. It memorizes the last used light output and with one single click it activates maximum power again.



### SLIDING HYPERFOCUS™

Focus from wide floodlight to narrow spot light. With the sliding Hyperfocus™ optical system it is easy to get the correct light output with a minimum loss of light. Just slide the head of the torch for the correct light setting and you are good to go.



### ERGONOMIC TASK SWITCH

The tactile ergonomic task switch is easy to operate and gives you a tactile feedback. The electronic task switch with solid silicone cover is specially designed to have a long lifetime.



### INTELLIGENT LIGHT CONTROL

The advanced electronic micro controller offers dimming of the light power by simple switch operation. In addition, it controls the light output for optimized battery lifetime.


## PACKAGING



### PACKAGING

<b>Customs Tariff Number:</b>	8513 1000
<b>Packaging:</b>	Recyclable Cardboard Packaging
<b>Single Box Content / Size / Weight:</b>	1 pcs, height/width/depth: 17.5 x 12 x 3 cm / 275 g
<b>Master Box Content / Size / Weight:</b>	18 pcs, height/width/depth: 20.2 x 19.5 x 37.5 cm / 5.2 kg
<b>Part. No.:</b>	502.5011
<b>EAN-CODE:</b>	5704049908246

## LIGHT CURVE AND RUNTIMES

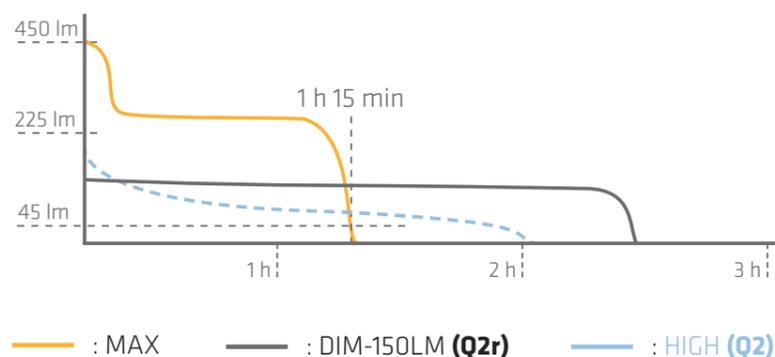

<b>MAX</b>	450 LUMENS 45	1 h   15 min
<b>DIMMING</b>	250 LUMENS 6	1 <sup>30</sup> min - 70 h
<b>DIM-150LM</b>	150 LUMENS 15	2 h   30 min
<b>Q2 - HIGH</b>	200 LUMENS 20	2 h

## SPECIFICATIONS

<b>LED / Focus Configuration:</b>	1 CREE Power Chip / Sliding Hyperfocus™
<b>Case Material / Surface Treatment:</b>	Prime Aluminium quality 6061, anodized
<b>Case Color:</b>	Anthracite Dark Grey
<b>Switch at Rear:</b>	Electronic Switch with Solid Silicone Button
<b>Dimensions:</b>	L: 118 mm, ø: 26 mm
<b>Weight incl. Battery:</b>	67 g
<b>Ingress Protection Rating:</b>	Splash Waterproof IPx4
<b>Temperature (Operation):</b>	-20°C to +50°C

## WHAT'S IN THE BOX



## DIMENSIONS



## ELECTRONICS

<b>Built in Controller:</b>	Yes, DIM and STEP mode
<b>Standard Power Source:</b>	1 x Li-Po (1100 mAh)
<b>Charging Time:</b>	80% = 1 h 45 min, 100% = 2 h 40 min
<b>Beam / Distance:</b>	Variable from Spot to Floodlight / 175 Meters
<b>Luminous Flux:</b>	Max: 450 lm / Dim: 250-6 lm
<b>Lighting Time:</b>	Max: 1 h 15 min / Low dim: 70 h
<b>Accessories Included:</b>	Pouch with Nylon Fastener and Press Stud, USB-Cable
<b>Charging Temperature:</b>	-0°C to +45°C