

ACCESSORIES

PRODUCT	DESCRIPTION	PARTNUMBER	WEIGHT	SINGLE BOX SIZE	EAN CODE
	Tripod for single lamp mount	410.9003	2.6 kg	L: 77 cm, W: 16 cm, H: 16 cm	5704049908116
	Spare battery with USB 5V/2A out. (5200mAh / 14.8V incl. internal charging!)	410.9001	554 g	H: 11.6 cm, W: 8.5 cm, D: 7 cm	5704049908093

DIMENSIONS



Distributor's Stamp:

Distributed worldwide by:

Steiner A/S
Dyssen 3
DK-8200 Aarhus N, Denmark

Phone: +45 87 525 212
www.suprabeam.com
info@suprabeam.com



4600 LUMENS



Li-ion
77 Wh



2140 g



2x110°



IP54

410.1301

KEY FEATURES / UNIQUE SELLING POINTS (USP)



WATER- AND DUST RESISTANT - IP54

Tested according to IP54 ensures water resistant and dust resistant protection. Designed for trouble-free usage in the field even in wet, dirty or dusty conditions.



180° ROTATING LIGHT

The W6r has two lightpanels, which can be rotated 180° individually. This means the W6r will be able to deliver light in two different directions at the same time.



90° ADJUSTABLE HANDLE

The 90° flexible handle on the W6r ensures a very flexible and versatile worklight for multiple situations.




EXTERNAL BATTERY

The externally charged 5200 mAh Li-ion battery can be charged, while using a spare battery in the W6r. Spare battery is sold separately (410.9001)



HIGH CRI +80

The W6r has High CRI (+80) to bring out the true colors. With the High CRI the W6r provides the most natural colors to make the workday a lot easier.



POWER BANK FUNCTION

The battery for the W6r can be used as a power bank. The battery inside the W6r has a USB 5V/2A Output on the back for charging a mobile phone.


PACKAGING



PACKAGING

Customs Tariff Number:	9405 4099
Packaging:	Carton Box
Single Box Content / Size / Weight:	1 pcs, Height/Width/Depth, 31.8/18.2/16 cm / 2660 g
Master Box Content / Size / Weight:	4 pcs, 38 x 33.5 x 33.5 cm / 11.2 kg
Part. No.:	410.1301
EAN-CODE:	5704049908086

LIGHT CURVE AND RUNTIMES

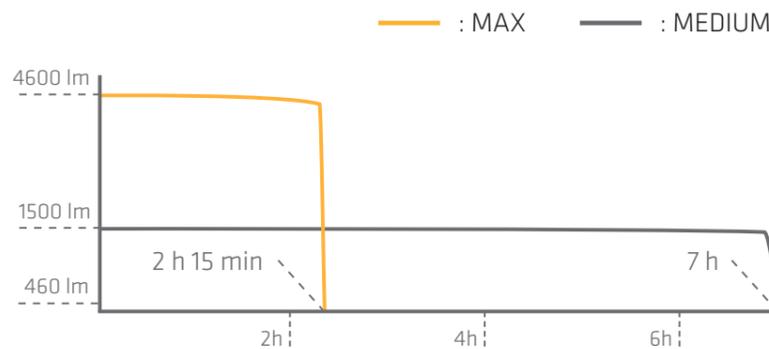

MAX	4600 LUMENS	2 h 15 min
HIGH	3000 LUMENS	3 h 30 min
MEDIUM	1500 LUMENS	7 h
LOW	750 LUMENS	14 h

SPECIFICATIONS

LED / Focus Configuration:	120pcsx SMD LEDs, 5700K
Case Material / Surface Treatment:	2K Plastic Soft/Hard
Case Color:	Black / Light Grey
Switch:	MAX, HIGH, MEDIUM, LOW
Dimensions:	H: 288mm, W: 176mm, D: 131mm
Weight incl. Battery:	2410g
Ingress Protection/Impact Protection Rating:	Water Resistant and Dustproof IP54 / IK07
Temperature (Operation):	-10°C to +40°C

ELECTRONICS

Built in Controller:	Yes, 4-step Controller by Press
Standard Power Source:	Li-ion 14.8V, 5200 mAh, 76.96 Wh
Charging Time:	5 hours
Beam Type / Distance:	90° Adjustable Handle, 2x180° Adjustable Floodlight / 80 m
Luminous Flux:	Max: 4600lm, High: 3000lm, Medium: 1500lm, Low: 750lm
Lighting Time:	Max: 2h 15 min, High: 3h 30 min, Medium: 7h, Low: 14h
Accessories Included:	110V -240V AC/DC Charger / 20V 1.1A
Charging Temperature:	-0°C to +45°C

WHAT'S IN THE BOX

WORKLIGHT



ADAPTER



BATTERY

