

ACCESSORIES

PRODUCT	DESCRIPTION	PARTNUMBER	WEIGHT	SINGLE BOX SIZE	EAN CODE
	Tripod for single lamp mount	410.9003	2.6 kg	L: 77 cm, W: 16 cm, H: 16 cm	5704049908116
	Magnet for worklight	410.9002	118 g	L: 4.5 cm, W: 4.5 cm, H: 4.5 cm	5704049908109

DIMENSIONS



Distributor's Stamp:

Distributed worldwide by:

Steiner A/S
Dyssen 3
DK-8200 Aarhus N, Denmark

Phone: +45 87 525 212
www.suprabeam.com
info@suprabeam.com



W2_r



2200
LUMENS



Li-ion
57.2 Wh



1150 g



110°



IP65

410.1201

KEY FEATURES / UNIQUE SELLING POINTS (USP)



WATER RESISTANT AND DUSTPROOF - IP65

Tested according to IP65 ensures water resistant and dustproof protection. Designed for trouble-free usage in the field even in wet, dirty or dusty conditions.



CONTINUOUS USE WITH CABLE

The W2r can be used with the charging cable plugged in. This means the W2r can be used for a whole workday without charging.



MAGNETIC (OPTIONAL ACCESSORY)

With our magnet for W2r and W4r (410.9003) the W2r can be fixed on any magnetic surface to use it as a fixed work light with the perfect angle.



180° ADJUSTABLE LIGHT

The 180° flexible handle on the W2r ensures a very flexible og versatile worklight for multiple situations.



HIGH CRI +80

The W2r has High CRI (+80) to bring out the true colors. With the High CRI the W2r provides the most natural colors to make the workday alot easier.



3 LED BATTERY INDICATORS

The 3 LED battery level indicators will indicate how much power is left in the W2r and when it needs to be recharged.

PACKAGING



PACKAGING

Customs Tariff Number:	9405 4099
Packaging:	Carton Box
Single Box Content / Size / Weight:	1 pcs, Height/Width/Depth, 23.5/25/8.5 cm / 1500 g
Master Box Content / Size / Weight:	4 pcs, 36 x 26 x 25 cm / 6.6 kg
Part. No.:	410.1201
EAN-CODE:	5704049908062


SPECIFICATIONS

LED / Focus Configuration:	Super bright COB LED, 6500K
Case Material / Surface Treatment:	Aluminium, 2K Plastic Soft/Hard
Case Color:	Black / Light Grey
Switch:	HIGH, MEDIUM, LOW
Dimensions:	H: 200mm, W: 225mm, D: 70mm
Weight incl. Battery:	1150g
Ingress Protection/Impact Protection Rating:	Water Resistant and Dustproof IP65 / IK07
Temperature (Operation):	-10°C to +40°C

ELECTRONICS

Built in Controller:	Yes, 3-step controller by press
Standard Power Source:	Li-ion 11V, 5200 mAh, 57.2 Wh
Charging Time:	3 hours 45 min
Beam / Distance:	180° Adjustable Handle / 65 m
Luminous Flux:	High: 2200lm, Medium: 1100lm, Low: 550lm
Lighting Time:	High: 3h, Medium: 5h 30 min, Low: 11h
Accessories Included:	110V -240V AC/DC Charger / 15V 1.5A
Charging Temperature:	-0°C to +45°C

LIGHT CURVE AND RUNTIMES

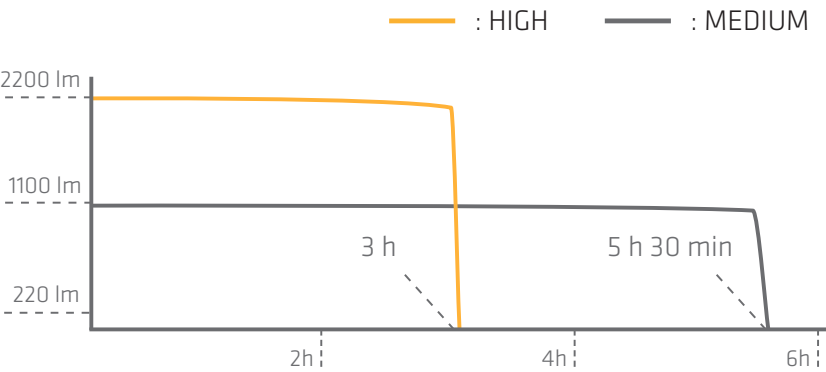

HIGH	2200 LUMENS	3 _h
MEDIUM	1100 LUMENS	5 _h 30 _{min}
LOW	550 LUMENS	11 _h

WHAT'S IN THE BOX

WORKLIGHT



ADAPTER

