





SPECIFICATIONS SSAAA 230 m 99 g 10°-70°



UNIQUE SELLING POINTS (USP)



SLIDING HYPERFOCUS™

The sliding Hyperfocus™ optical system collects the LED radiance and distributes it with maximum efficiency from a perfect round flood light beam to a highly intensive, long range spot beam. All just by one-hand sliding of the head.



DIMMING + MEMORY

The new electronic task switch combined with our new dimming control, offers simple and stepless power adjustment from 380 down to 10 lumens. It memorizes the last used light output and with one single click it activates maximum power again.



ERGONOMIC TASK SWITCH

The tactile ergonomic task switch is easy to operate and gives you a tactile feedback. The electronic task switch with solid silicone cover is specially designed to have a long lifetime.



INTELLIGENT LIGHT CONTROL

The advanced electronic micro controller offers dimming of the light power by simple switch operation. In addition, it controls the light output for optimized battery lifetime.



COOLING CORE


The Power LED is mounted with "heat-sink technology". The heat is diverted throughout the core structure. Therefore, you will be able to get maximum output for a much longer period of time.



WATER RESISTANT - IPX4

The Q3 is rated IPX4, which means it is water resistant. Use the Q3 in all weather conditions without having to worry about your light.

LIGHT CURVE AND RUNTIMES

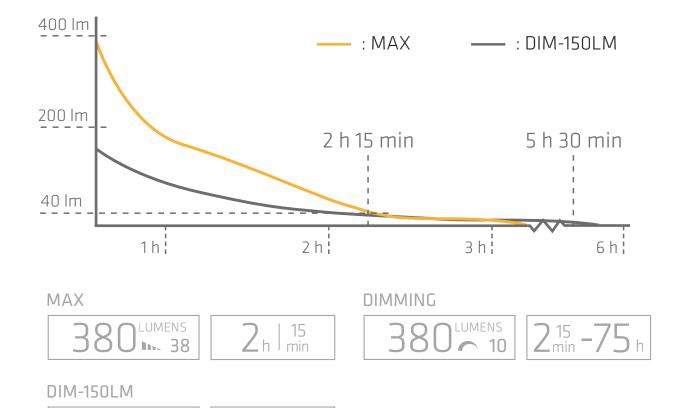

30

SPECIFICATIONS

LED / Focus configuration:	1 CREE Power Chip / Sliding Hyperfocus™
Case Material / Surface Treatment:	Anodized, High Strength Aluminium
Case Color:	Anthracite Dark Grey
Switch at rear:	Electronic Switch With Solid Silicone Cover
Dimensions:	L: 113.5mm, ø: 26.5mm
Weight incl. battery:	99g
Ingress Protection Rating:	Splash Waterproof IPx4
Temperature (Operation):	-20°C to +50°C

LUMENS

ELECTRONICS

Built in Controller:	Yes, dimmable
Standard Power Source:	3 x AAA Alkaline
Compatible with rechargeable cells:	Yes, with AAA NiMh 1.2V
Beam / Distance:	Variable from Spot to Floodlight / 230 Meters
Luminous Flux:	Max: 380 lm / Dim: 380-10 lm
Lighting Time:	Max: 2 h 15 min / Low Dim: 75 h
Accessories included:	Pro. Quality Pouch with Velcro and Press Stud, Strap

PACKAGING

Customs Tariff Number:	8513 1000
Packaging:	Presentation tube
Single Box Content / Size / Weight:	1 pcs, height/diameter, 18 x 8.5 cm / 267 g
Master Box Content / Size / Weight:	32 pcs, 35 x 35 x 40 cm / 8.55 kg
Order's Address:	info@suprabeam.com
Part. No.:	503.1105
EAN-CODE:	5704049907515





PRESENTATION TUBE

REUSABLE LABEL

FEATURES



INTELLIGENT LIGHT CONTROL (ILC)

Our intelligent light control lets you switch between different light outputs



COOLING CORE

The high strength aluminium cooperates with the "heatsink" to cool off the LED



WATER RESISTENT - IPX4

This IP-rating indicates that your product is water resistant



SLIDING FOCUS

Focus from wide floodlight to narrow spot light with the one handed sliding focus



ELECTRONIC DIMMING

Our eletronic dimming lets you dim the light to the desired level with ease



COMPATIBLE WITH NIMH

With NiMH compatibility you will be able to make your alkaline torch or headlamp rechargeable

RECOMMENDED ACCESSORIES



COLOUR FILTERS

High quality filters for night operations. Compatible with Q2, Q3-series and V-series with the colour filter adapter.



CAMPING BULB FOR Q3

Convert your torch into a superbly effective bulb for multi application use, workshop, car, tent or camp fire.



HELMET MOUNT

The Helmet Mount fits on safety helmets with a mounting grove on the side,



FAST RAIL MOUNT

The Fast Rail Helmet Mount fits on safety helmets with a mounting grove on the side.



BIKE MOUNT

Our Bike Mount with fully rotating universal clamp-antivibration grip. Fits almost every bike bar.