

# DIMENSIONS



Distributor's Stamp:

Distributed worldwide by:

Steiner A/S  
Dyssen 3  
DK-8200 Aarhus N, Denmark

Phone: +45 87 525 212  
[www.suprabeam.com](http://www.suprabeam.com)  
[info@suprabeam.com](mailto:info@suprabeam.com)

# suprabeam®

# I2r



# 700 LUMENS



Li-ion  
9.6 Wh



373 g



120°



IP54


410.1002

## KEY FEATURES / UNIQUE SELLING POINTS (USP)



### WATER- AND DUST RESISTANT - IP54

Tested according to IP54 ensures water resistant and dust resistant protection. Designed for trouble-free usage in the field even in wet, dirty or dusty conditions.



### MAGNETIC

With the built in magnet in the bottom of the I2r it can be fixed on any magnetic surface to use it as a fixed work light for hands free operation.



### 180° FOLDABLE LIGHT

With the 180° foldable and 180° rotating head the I2r ensures a very flexible and versatile worklight for multiple situations.



### DIMMING

The dimming switch offers simple and stepless power adjustment. Adjust the light from 60 to 700 lumens with a simple turn of the switch.



### HIDDEN HOOK

At the bottom the I2r there is a hidden hook which enables you to hang your worklight up high to provide you with a great area light.



### TOP LIGHT

The I2r has a powerful top light built in to the top of the foldable arm, making it even more versatile for use in any situation


## PACKAGING



### PACKAGING

<b>Customs Tariff Number:</b>	8513 1000
<b>Packaging:</b>	Carton Box
<b>Single Box Content / Size / Weight:</b>	1 pcs, Height/Width/Depth, 25/15/5.5 cm / 550 g
<b>Master Box Content / Size / Weight:</b>	12 pcs, 36 x 26.5 x 32 cm / 7.4 kg
<b>Part. No.:</b>	410.1002
<b>EAN-CODE:</b>	5704049908031

## LIGHT CURVE AND RUNTIMES

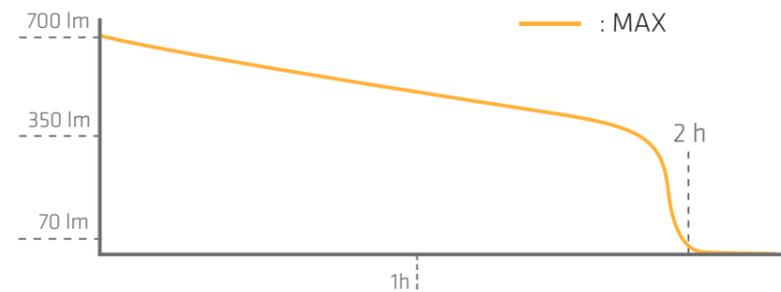

### DIMMING

700 LUMENS	60	2-16 h
------------	----	--------

### TOP LIGHT

120 LUMENS	10 h
------------	------

## SPECIFICATIONS

<b>LED / Focus Configuration:</b>	Worklight: Super Bright COB LED,6,500K, Top Light: Super Bright SMD LED, 6,500K
<b>Case Material / Surface Treatment:</b>	Aluminium, 2K Plastic Durable Housing
<b>Case Color:</b>	Black / Light Grey
<b>Switch:</b>	Worklight: Stepless Dimming Wheel, Top light: Switch, ON/OFF
<b>Dimensions:</b>	H: 220 mm/400 mm, W: 46 mm, D: 66.5 mm
<b>Weight incl. Battery:</b>	373g
<b>Ingress Protection/Impact Protection Rating:</b>	Water- and Dust Resistant IP54 / IK07
<b>Temperature (Operation):</b>	-10°C to +40°C

## ELECTRONICS

<b>Built in Controller:</b>	Yes, dimmable
<b>Standard Power Source:</b>	Li-ion 3.7V, 2600 mAh, 9.62 Wh
<b>Charging Time:</b>	3 hours 45 min
<b>Beam Type:</b>	180° rotating and flipping head with Top Light
<b>Luminous Flux:</b>	Dimming: 700-60 lm / Top Light: 120 lm
<b>Lighting Time:</b>	Dimming: 2-16 h / Top Light: 10 h
<b>Accessories Included:</b>	110V -240V AC/DC Charger / 5V 1A, USB-C Cable
<b>Charging Temperature:</b>	-0°C to +45°C

## WHAT'S IN THE BOX

### WORKLIGHT



### ADAPTER



### USB-C CABLE

