

## ACCESSORIES

PRODUCT	DESCRIPTION	PARTNUMBER	WEIGHT	SINGLE BOX SIZE	EAN CODE
	Tripod for single lamp mount	410.9003	2.6 kg	L: 77 cm, W: 16 cm, H: 16 cm	5704049908116
	Magnet for worklight	410.9002	118 g	L: 4.5 cm, W: 4.5 cm, H: 4.5 cm	5704049908109

## DIMENSIONS



Distributor's Stamp:


Distributed worldwide by:

Steiner A/S  
Dyssen 3  
DK-8200 Aarhus N, Denmark

Phone: +45 87 525 212  
[www.suprabeam.com](http://www.suprabeam.com)  
[info@suprabeam.com](mailto:info@suprabeam.com)

# suprabeam®

# W2r

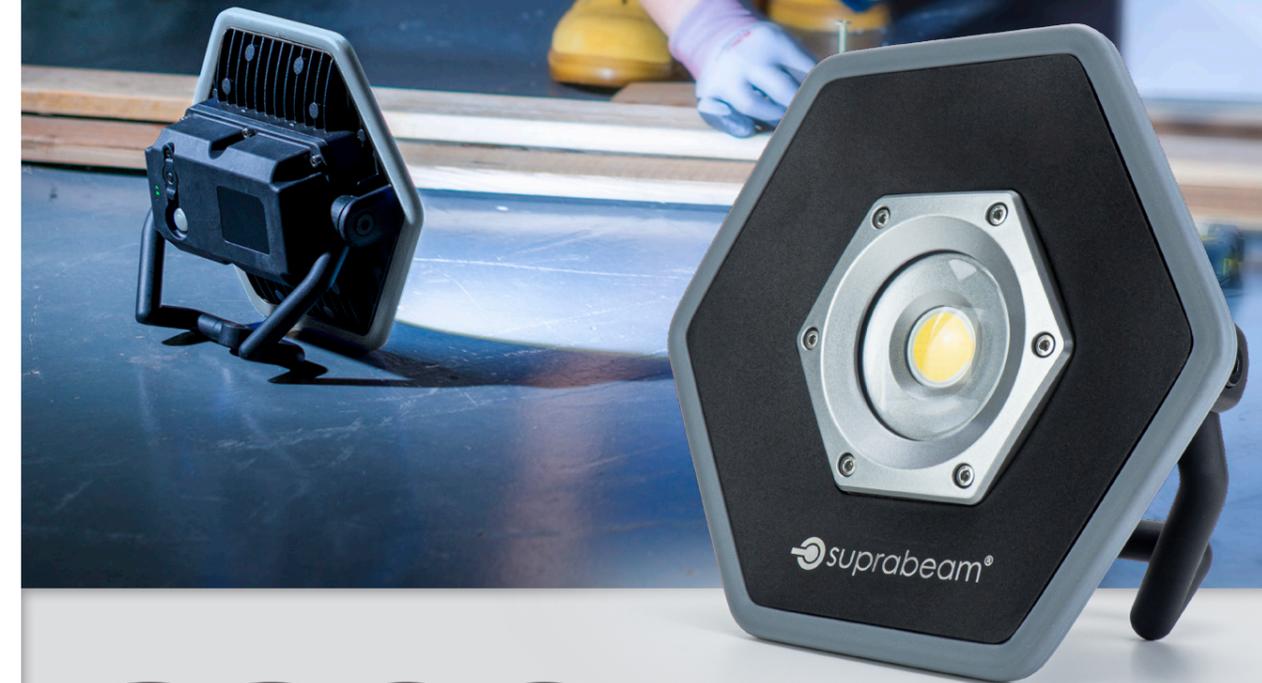

# 2200 LUMENS

  
Li-ion  
57.7 Wh

  
1150 g

  
110°

  
IP65

410.1201

## KEY FEATURES / UNIQUE SELLING POINTS (USP)



### WATER RESISTANT AND DUSTPROOF - IP65

Tested according to IP65 ensures water resistant and dustproof protection. Designed for trouble-free usage in the field even in wet, dirty or dusty conditions.



### MAGNETIC (OPTIONAL ACCESSORY)

With our magnet for W2r and W4r (410.9003) the W2r can be fixed on any magnetic surface to use it as a fixed work light with the perfect angle.



### 180° ADJUSTABLE LIGHT

The 180° flexible handle on the W2r ensures a very flexible and versatile worklight for multiple situations.



### CONTINUOUS USE WITH CABLE

The W2r can be used with the charging cable plugged in. This means the W2r can be used for a whole workday without charging. Light output with cable is reduced to 1000 lumen.



### HIGH CRI +80

The W2r has High CRI (+80) to bring out the true colors. With the High CRI the W2r provides the most natural colors to make the workday a lot easier.



### 3 LED BATTERY INDICATORS

The 3 LED battery level indicators will indicate how much power is left in the W2r and when it needs to be recharged.


## PACKAGING



### PACKAGING

<b>Customs Tariff Number:</b>	9405 4990
<b>Packaging:</b>	Carton Box
<b>Single Box Content / Size / Weight:</b>	1 pcs, Height/Width/Depth, 23.5/25/8.5 cm / 1500 g
<b>Master Box Content / Size / Weight:</b>	4 pcs, 36 x 26 x 25 cm / 6.6 kg
<b>Part. No.:</b>	410.1201
<b>EAN-CODE:</b>	5704049908062

## LIGHT CURVE AND RUNTIMES

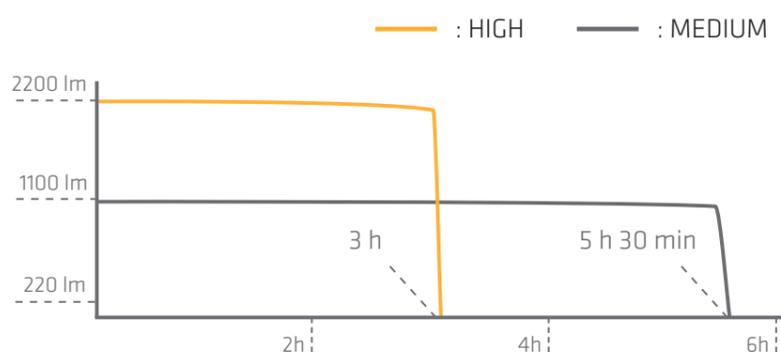

HIGH	2200 LUMENS	3 h
MEDIUM	1100 LUMENS	5 h   30 min
LOW	550 LUMENS	11 h

## SPECIFICATIONS

<b>LED / Focus Configuration:</b>	Super bright COB LED, 6500K
<b>Case Material / Surface Treatment:</b>	Aluminium, 2K Plastic Soft/Hard
<b>Case Color:</b>	Black / Light Grey
<b>Switch:</b>	HIGH, MEDIUM, LOW
<b>Dimensions:</b>	H: 200mm, W: 225mm, D: 70mm
<b>Weight incl. Battery:</b>	1150g
<b>Ingress Protection/Impact Protection Rating:</b>	Water Resistant and Dustproof IP65 / IK07
<b>Temperature (Operation):</b>	-10°C to +40°C

## ELECTRONICS

<b>Built in Controller:</b>	Yes, 3-step controller by press
<b>Standard Power Source:</b>	Li-ion 11.1V, 5200 mAh, 57.72 Wh
<b>Charging Time:</b>	3 hours 45 min
<b>Beam / Distance:</b>	180° Adjustable Handle / 65 m
<b>Luminous Flux:</b>	High: 2200lm, Medium: 1100lm, Low: 550lm (cabled output 1000lm)
<b>Lighting Time:</b>	High: 3h, Medium: 5h 30 min, Low: 11h
<b>Accessories Included:</b>	110V -240V AC/DC Charger / 15V 1.5A
<b>Charging Temperature:</b>	-0°C to +45°C

## WHAT'S IN THE BOX

WORKLIGHT



ADAPTER

