


SPAREPARTS

PRODUCT	DESCRIPTION	PARTNUMBER	EAN CODE
	USB-C Charging cable 1 m	995.0145	5704049900271

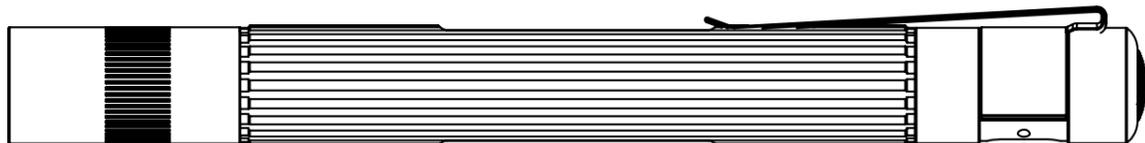

Distributor's Stamp:

Suprabeam is manufactured by the Steiner Group and distributed worldwide by:

Steiner A/S
Dyssen 3
DK-8200 Aarhus N, Denmark

Phone: +45 87 525 212
www.suprabeam.com
info@suprabeam.com

 **suprabeam**®

Q1*r*



550
LUMENS


Li-Po
720 mAh


100 m


48 g


20° - 70°

501.5011

KEY FEATURES / UNIQUE SELLING POINTS (USP)



POWERFUL PEN TORCH

The Q1r is our most powerful pen torch to date. With 550 lumens you get extreme power out of a torch that fits right in your pocket.



INTERNAL USB-C CHARGING

Compatible with USB-C. This enables you to charge everywhere, either with a 5V/2A adapter, through your computer or with a car charger. Charge up to 80% in only 1 hour.



SAME SIZE AS Q1

The Q1r is the same size as classic Suprabeam penlight Q1, but with the Q1r you get more than 3 times the output with an impressive 550 lumens.



ERGONOMIC ELECTRONIC SWITCH

The tactile ergonomic task switch is easy to operate and gives you a tactile feedback. The electronic task switch with solid silicone cover is specially designed to have a long lifetime.



ROTATING HYPERFOCUS

The rotating Hyperfocus™ lets you go from flood to spot with a light turn of the lamp-head. Control the focus with two fingers and switch quickly from 20 degrees to 70 degrees.



DIM- AND STEP-MODE

The new electronic task switch combined with our new dimming control, offers simple and stepless power adjustment from 125 down to 6 lumens. Change to STEP-mode for a classic 3-step control.


PACKAGING



PACKAGING

Customs Tariff Number:	8513 1000
Packaging:	Recyclable Cardboard Packaging
Single Box Content / Size / Weight:	1 pcs, height/width/depth: 17.5 x 6 x 2 cm / 125 g
Master Box Content / Size / Weight:	27 pcs, height/width/depth: 20.2 x 19.5 x 19.5 cm / 3.6 kg
Part. No.:	501.5011
EAN-CODE:	5704049908222

LIGHT CURVE AND RUNTIMES

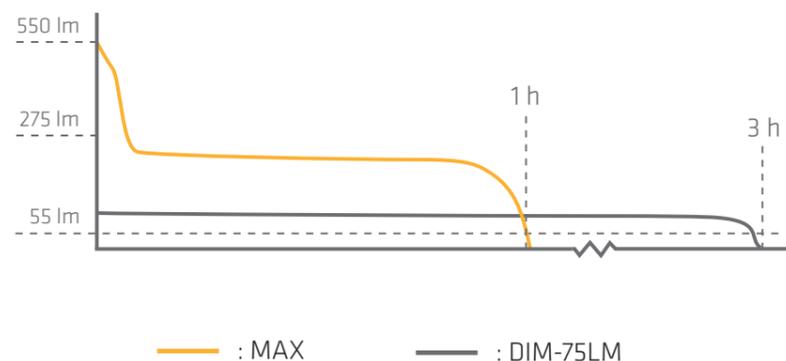

MAX	550 LUMENS 55	1 h
DIMMING	125 LUMENS 6	1 ⁴⁵ min -50 h
DIM-75LM	75 LUMENS 7.5	3 h

SPECIFICATIONS

LED / Focus Configuration:	1 CREE Power Chip / Rotating Hyperfocus™
Case Material / Surface Treatment:	Prime Aluminium quality 6061, anodized
Case Color:	Anthracite Dark Grey
Switch at Rear:	Electronic Switch with Solid Silicone Button
Dimensions:	L: 141.5 mm, ø: 15 mm
Weight incl. Battery:	48 g
Ingress Protection Rating:	IP20
Temperature (Operation):	-20°C to +50°C

ELECTRONICS

Built in Controller:	Yes, DIM and STEP mode
Standard Power Source:	1 x Li-Po (720 mAh)
Charging Time:	80% = 1 h, 100% = 1 h 30 min
Beam / Distance:	Variable from Spot to Floodlight / 100 Meters
Luminous Flux:	Max: 550 lm / Dim: 125-6 lm
Lighting Time:	Max: 1 h. / Low dim: 50 h
Accessories Included:	Attachment Clip, USB-C Cable
Charging Temperature:	-0°C to +45°C

WHAT'S IN THE BOX

TORCH



USB-CABLE



MANUAL



DIMENSIONS

